

Provides cost-efficiency between
30 and 40%

Powerful adhesion of polystyrene heat panels (XPS and EPS) Instant adhesion and wall plugging within two hours. More economical. Ready to use in aerosol can **Up to 14 m² panel adhesion for each can** Minimum expansion during drying period After dried, no further expansion and shrinkage A lighter material compared to plaster, **alternative material**, used in heat insulation systems. **No more extra burden or weight to building** High yield up to 55 liters, depending on the humidity and temperature **Fire Class: E (According to EN 13501-1. It refers to B2 for DIN 4102)**



No more extra burden or weight to building

Instant adhesion and wall plugging within two hours.



REVOLUTION IN INSULATION COSTS

Provides cost-efficiency between
30 and 40%



Gun & Spray Foam



960 ADHESIVE PU FOAM
XPS, EPS AND INSULATING BOARDS

Creates Permanent Solutions

KTL_057
EN/1104/2016/REV02



twitter.com/AkfixSealants
youtube.com/user/AkfixSealants
instagram.com/AkfixSealants
vimeo.com/AkfixSealants
www.akfix.com

pinterest.com/Akfixsealants
plus.google.com/+AkfixSealantsAdhesives
facebook.com/AkfixSealantsAdhesives
linkedin.com/in/AkfixSealants
info@akfix.com

Akfix

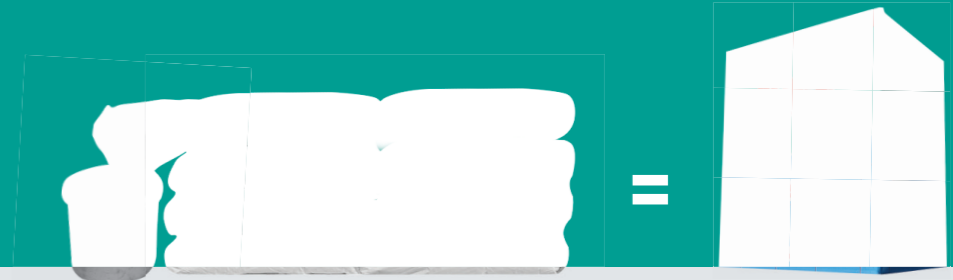
www.akfix.com • info@akfix.com

Perfect for fixing heat insulation panels, filling gaps and repairing disparities.

Fast and **powerful adhesion** to various construction material.

960 ADHESIVE PU FOAM

Reduces purchasing, transportation, **storage**, application and labour costs



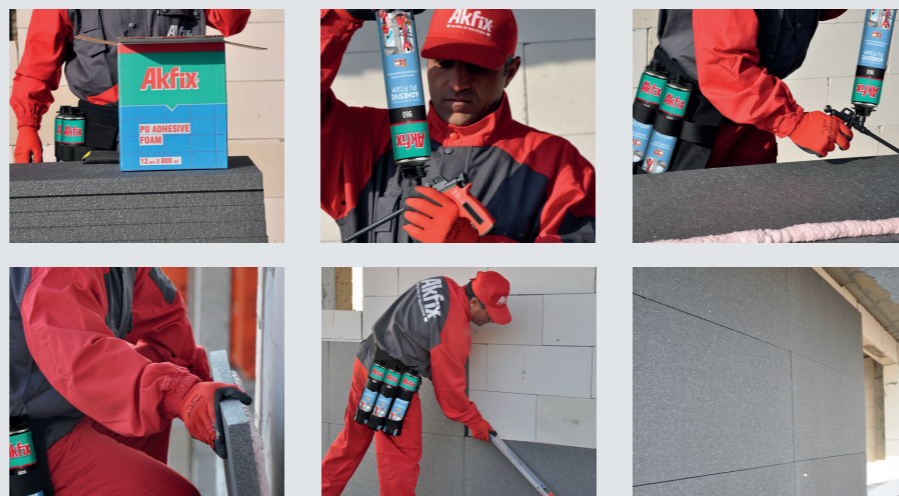
You don't need **these any more**



This technique is so obsolete and **very expensive**

expensive















Dries quickly, saves time



Applicable **4 times** faster than conventional method

up to 14m² panel adhesion

More economical

	All Generations Mortar Adhesive	New Technology Akfix 960 Adhesive Foam
Storage and Transportation	Transportation of 500kg 	Transportation of 16 kg 
Praperation Time	About 2 Hours 	About 10 mins. 
Application Duration (in one min.)	1 Plate 	4 Plate 
Bonding Time	~ 48 hours 	~ 2 hours 
Extra Load Applied on Building	500 kg 	16 kg 
Labour	3 People 	1 Person 
Heat insulation comparison	30 cm mortar thickness equals to 	0,2 cm Akfix 960 thickness 

Comparisons are made for 200m² area