

www.Akfix.com

ADHESIVES

SEALANTS

AEROSOLS

PU FOAMS

COATINGS

CREATES

PERMANENT

SOLUTIONS

**Akfix**<sup>®</sup>  
MASTER OF SOLUTIONS



www.Akfix.com  
info@akfix.com




/Akfixsealants

**AKKIM**  
SEALANTS & ADHESIVES

www.akkim.net

KTL\_100/ENG.24.11.2017 REV.02




www.akfix.com • info@akfix.com

\* AKKIM has a right to amend the product information and images in this catalogue without notice. Images and product properties may be different dependent on the target market or sales zone.

**AKKIM**  
SEALANTS & ADHESIVES

www.akkim.net

AVAILABLE ON THE  
GOOGLE PLAY & APP STORE



# CREATES PERMANENT SOLUTIONS



## Research & Development

Akfix develops products responding to current and future requirements through the R&D team consisting of experienced and specialized Engineers and Chemists.

## Strong Marketing & Branding Management



Akfix, embracing and employing "Think globally, act locally" strategy, heavily invests in brand and marketing in the entire markets it operates. Furthermore, developing diversified marketing applications based on the expectations and characteristics of various markets.



## Vast Production Capacity

Hundreds of Akfix products are produced in the Facility of Akkim Yapı Kimyasalları A.Ş., established on an immense area in where various manufacturing stations are located within.



## Wide Product Range

Akfix, having a product range with more than 450 products in various categories, enables its customers to satisfy majority of their requirements through one-stop shopping.

## Exports to 100+ Countries

Akfix products are offered in more than 100 countries. Akfix, while offering different qualified products based on the local conditions of each country, it also aims to expand its presence in current markets.



## Provides solution Worldwide

Akfix offers permanent solutions in many geographical locations worldwide for construction and building, furniture, automotive maintenance and repair, marine vessels maintenance and repair, other technical industries and DIY sector.



## Qualified Employees

Qualified human resources employed in Akfix is the foremost foundation underlying the high demand that Akfix brand receives in several industries within the product range consisting of hundreds of products in more than 100 countries.

# CONTENTS

## Fire Rated Products

P636	Fire Rated Pu Sealant	04
AC607	Fire Stop Acrylic Sealant	04
820P	B1 Fire Rated Pu Gun Foam	04
820	B1 Fire Rated Straw Pu Foam	05
840 / 840P	B2 Fire Rated Pu Foam (Straw / Gun)	05

## Adhesives

ALLBOND	MS High Tack	07
ALLBOND	MS Fast&Strong	07
MS410	Curtain Rail Adhesive	07
960/960P	PU Adhesive Gun Foam / Straw	08
962P	Concrete, Stone & Brick Adhesive	08
965	Roof&Tile Adhesive Pu Gun Foam	09
966P	Subfloor Adhesive Gun Foam	09
510	PU Montage Adhesive	09
610	PU Express Montage Adhesive [Transparent]	10
612J	Aluminum Corner Joint Express	10
616C	PU Express Construction Adhesive	10
PA360	PUR Wood Marine Adhesive	11
360FC	Fast Cure Pur Wood Glue	11
PA370	Express Pu Wood Adhesive [Transparent]	11
480	Pedestal Adhesive	12
PA550	Pvc Membran Press Adhesive [Pu Dispersion Based]	12
HB260	Hybrid Flooring Adhesive [Wood&PVC]	12
HM220	Eva Hot Melt Straight Edge Banding Adhesive	13
HM226	Eva Hot Melt Curve Edge Banding Adhesive	13
HM774	Eva Hot Melt Straight Edge Banding Adhesive	13
HM788	Eva Hot Melt Straight Edge Banding Adhesive	14
D2	D2 PVA Glue Super Frame Work	14
D3	D3 PVA White Glue Superframe Work	14
C900	Chemical Anchor Polyester	15
C920	Easf Chemical Anchor [Styrene-Free]	15
C950	Chemical Anchor Pur Epoxy	15
310	Montage Adhesive Water Based	16
312P	Panel Adhesive [Xps, Eps, And Plaster Board] Water Based	16
320C	Cornice Adhesive Water Based	16
705	Universal Fast Adhesive	17
707	Shoe & Leather Kit	17
702	Super Glue Cyanoacrylate	17
303	Super Glue Cyanoacrylate	18
C103	Debonder Gel	18
C105	Debonder Spray	18
202	Universal Contact Adhesive Toluene Free	18
204	Universal Contact Adhesive	19
HM208	Hot Melt Stick	19
R305	PVC Cement THF Free	19
R306	PVC Cement	20
G400	Granite And Marble Adhesive	20
G500	Granite And Marble Adhesive Liquid	20
710	Stone & Marble Fast Adhesive	21
E300	Waterproof Epoxy	21
E340	Quick Setting Epoxy	21
E350	Steel & Quick Fix Epoxy	22
WA400	Wallpaper & Bordure Adhesive Universal	22
WA500	Heavy Duty Wallpaper Adhesive Universal	22

## Sealants

ALLBOND	MS Flexi	25
ALLBOND	MS Clear	25
ALLBOND	MS Universal	25
ALLBOND	MS Teak Deck Caulking	26
P625	Polyurethane Sealant [Construction]	26
P635	Polyurethane Sealant [Construction]	26
647FC	PU Metal Sealant Fast Curing [Automotive]	27
P645	PU Metal Sealant (Automotive&Construction)	27
638TD	Textured Pu Sealant	27
900N	Neutral Mirror Silicone	28
905N	Neutral Silicone [Building & Construction]	28
910N	Roof & Plumbing Silicone	28
905E	Neuseal Neutral Silicone	29
915N	Weatherseal Silicone	29
918N	Neutral Sanitary Silicone	29
917N	IG Sealant Neutral	30
100S	100% Silicone Sanitary	30
100D	Shower Cabine Kitchen & Bathroom Silicone	30
100AQ	Aquarium Non-Toxic Silicone	31
100E	Universal Silicone Sealant	31
AC590	Duct Seal Acrylic	31
AC592	Acoustic Sealant	32
AC600	Pink Seal	32
AC603	Clear Seal	32
AC604	Ultra Light Gap Filler	33
AC605	Acrylic Sealant	33
AS606	Siliconized Acrylic Sealant	33
AS609	All Seasons Caulk Sealant	34
	Wall Repair Patch Kit	34

## PU Foams

MAXIMUM	Straw Foam 65L	36
850	Mega Pu Gun Foam 65 L	36
872	Mega Pu Gun Foam 70L	36
940	Safety Valve Reusable Pu Foam	37
805P	PU Gun Foam Professional	37
805	PU Foam Multi Purpose	37
806	Door & Window Low Expansion Pu Foam	38
3XL	High Expanding Pu Gun Foam	38
888P	Flexible Pu Gun Foam	38
812	PU Foam Multi Purpose Winter -12°C	39
812P	PU Gun Foam Multi Purpose Winter -12°C	39
885	Mega Pu Gun Foam Winter -25°C 70 L	39
807	PU Foam Multi Purpose Winter -6°C	40
807P	PU Gun Foam Multi Purpose Winter -6°C	40
800C	Foam Cleaner	40
FENCE POST FIX		41

## Coatings

907N	Epdm Silicone Sealant	45
602	Bitum Sealant	45
640SL	Self Leveling Pu Sealant	45
POLYUREA1044	Standard Pure	46
POLYUREA 1045	Eco Pure	46
POLYUREA FA 1044	Potable Water & Food Contact Approved	46
POLYUREA FR 1044	Fire Retardant	47
POLYUREA AS 1044	Antistatic	47
POLYUREA HP 1044	Abrasion Resistant Polyurea	47
POLYUREA AL 1070	Aliphatic	48
POLYUREA PA 1070	Polyaspartic Soft	48
POLYUREA PA 1005	Polyaspartic Hard	48
POLYUREA HB 1010	Hybrid Systems	49
PUR 450	PU Waterproofing Membrane	49
T 525	PU Topcoat Waterproofing Membrane	49
POLYUREA JOINT SEALANTS	Jh 1070 /Jh1080	50
POLYUREA HM 80		50
AQUA ZERO	Hybrid Waterproofing Membrane	50
PU ADH 325	Artificial Grass Adhesive	51
PU ADH 315	Rubber Tile And Parquet Adhesive	51
PU ADH 305	Rubber Tile And Parquet Adhesive	51
PUR PRIMER 90	Transparent	52
PRIMER 80	Moisture Tolerant Epoxy Primer	52
PRIMER 580	Standard Epoxy Primer	52
PRIMER M80	Epoxy Primer For Metal	53
BINDER PU RB 205	Standard Press	53
BINDER PU RB 102	Pour In Place	53
BINDER PU RB 103	Aliphatic Binder	54
DF 25	2K Polyurethane Dilatation Filler	54
SPR 230	2K Spray Foam	54

## Aerosols

E60	Electrical Contact Cleaner	56
E70	Penetrating Oil Spray	56
E80	Silicone Lubricant	56
E90	Anti Spatter Spray	57
C104	Label & Sticker Remover	57
C108	Paint Remover	57
A40 MAGIC	Corrosion Inhibitor, Lubricant And Multi Purpose Protector Spray	58

## Automotive; Repair, Care, Protective Products

ALLBOND	MS Windshield Adhesive	60
WINDSHIELD	PU Windshield Adhesive	60
WINDSHIELD PRIMER	Windshield Primer	60
706	Auto Kit Fast Adhesive	61
HT300	Gasket Maker RIV Silicone	61
R110	Brake And Clutch Cleaner	61
R60	Tyre Repair Kit	62
R70	Tyre Cleaner & Polish Foam	63
R76	Engine Cleaner	63
INDUSTRIAL WIPES		63
C12	Metal Polish	63

## Spray Paints

ACRYLIC SPRAY PAINT	65
METAL MATT EFFECT SPRAY PAINT	65
METAL GLOSSY EFFECT SPRAY PAINT	65
BUMPER SPRAY PAINT	66
INOX SPRAY PAINT	66
ENAMEL SPRAY PAINT	66

## ACCESSORIES

67

## TAPES

68

# 01 FIRE RATED

PRODUCTS



*Creates Permanent Solutions*

## P636 FIRE RATED PU SEALANT


One-component, low-modulus polyurethane sealant that cures on exposure to atmospheric humidity. It possesses excellent adhesion to all typical construction materials such as cement based materials, brick, ceramic, glass, wood, galvanized and painted sheet iron and various plastics.

### FEATURES

More than 4 hours of fire resistance in certain conditions without using backfilling materials. Possesses permanent elasticity. No sagging - Thixotropic. No surface tackiness after full cure. Do not pick up dirt. No shrinkage. Enhanced storage stability. Can be applied with hand gun and tooled easily. Paintable. Cures bubble-free 25% movement capability. Conforms to BS 6920 for the metallic water soluble impurities. Conforms to the requirements of VOC content specifications in LEED credit EQc4.1 "Low-emitting products" of SCAQMD rule 1168. M2 Fire Rating according to NF P 92-501 radiation test. A+ indoor air quality rating.

### APPLICATION AREAS

Fire rated sealing and bonding applications. Expansion joints between many different construction materials. Movement and connection joints in floors. Indoor and outdoor applications for pedestrian and traffic areas. Joints between prefabricated construction materials. Sealing and bonding of ventilation ducts, gutters and spouts etc. For expansion joints between pre-cast concrete panels. Meets the requirements of ISO 11600 F 25 LM

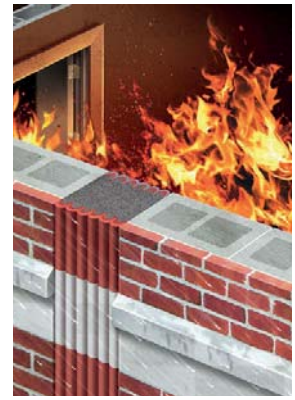

More than 4 hours fire resistance according to EN 1366-4



## AC607 FIRE STOP ACRYLIC SEALANT

Single component water based fire rated acrylic sealant ideal for sealing joints to prevent the passage of flammable gases and toxic smoke in compartment walls and floors.

### FEATURES

M1 Fire Rating according to NF P 92-501 radiation test. Good unprimed adhesion to most common construction substrates. Easy to apply. Remains flexible. Paintable. Non-slump.

### APPLICATION AREAS

Sealing of joints and seams, or at certain areas where requirements for fire resistance are mandatory.



More than 4 hours fire resistance according to EN 1366-4



## 820P B1 FIRE RATED PU GUN FOAM

One component, moisture curing, self expanding, ready to use polyurethane foam with propellants which are completely harmless to ozone layer. It has a fire rating of up to 235 minutes in certain configurations. High quality PU foam recommended for sealing applications where fire resistance is required. Gun use professional type pu foam features higher yield, easier application and reusability.

### FEATURES

According to EN 1366-4 fire retardant up to 235 min. Efficient seal against smoke and gas. Does not contain CFC's and H-CFC's. Excellent adhesion & filling capacity. Excellent mounting capacity and stability. High yield up to 55 liters depending on temperature and humidity. Excellent adhesion on most substrates (except Teflon, PE and PP). High filling capacity. High thermal & acoustical insulation value. After cured, it can be painted, cut, trimmed. No shrinkage. Mould and water resistant. Conforms to fire class B1 (DIN 4102).

### APPLICATION AREAS

All applications where fire retardant properties are required such as: Installation of door and window frames. Filling and sealing gaps, joints and cavities. Filling of penetrations in walls. Heat insulation of roof construction. Sealing of cable and pipe penetrations. Soundproofing and sealing partition walls. Bonding of insulation materials. Multi-Purpose, adhesion and fixation.



Up to 235 minutes fire resistance according to EN 1366-4



## 820 B1 FIRE RATED STRAW PU FOAM

One component, moisture curing, self expanding, ready to use polyurethane foam with propellants which are completely harmless to ozone layer. It has a fire rating of up to 235 minutes in certain configurations. High quality PU straw foam recommended for sealing applications where fire resistance is required. It is designed for easy dispensing through the straw adapter included with each can.

### FEATURES

According to EN 1366-4 fire retardant up to 235 min. Efficient seal against smoke and gas. Does not contain CFC's and H-CFC's. Excellent adhesion & filling capacity. Excellent mounting capacity and stability. High yield up to 45 liters depending on temperature and humidity. Excellent adhesion on most substrates (except Teflon, PE and PP). High filling capacity. High thermal & acoustical insulation value. After cured, it can be painted, cut, trimmed. No shrinkage. Mould and water resistant. Conforms to fire class B1 (DIN 4102).

### APPLICATION AREAS

All applications where fire retardant properties are required such as: Installation of door and window frames. Filling and sealing gaps, joints and cavities. Filling of penetrations in walls. Heat insulation of roof construction. Sealing of cable and pipe penetrations. Soundproofing and sealing partition walls. Bonding of insulation materials. Multi-Purpose, adhesion and fixation.



Up to 235 minutes fire resistance according to EN 1366-4



## 840/840P B2 FIRE RATED PU FOAM STRAW / GUN

Self-extinguishable aerosol polyurethane foam for filling, sealing and bonding gaps. It is designed for easy dispensing through the straw adapter included to each can and gun adapter.

### FEATURES

Rated B2 according to DIN 4102. Excellent adhesion to most building materials. It does not contain any propellant gases that are harmful to the ozone layer. It can be painted after curing. It can be cut and trim.

### APPLICATION AREAS

Fixing and insulating of door and window frames. Filling and sealing of gaps, joints and cavities. Filling of penetrations in walls. Insulating electrical outlets and water pipes.




# FIRE RETARDANT PRODUCTS



# 02

# ADHESIVE

# PRODUCTS

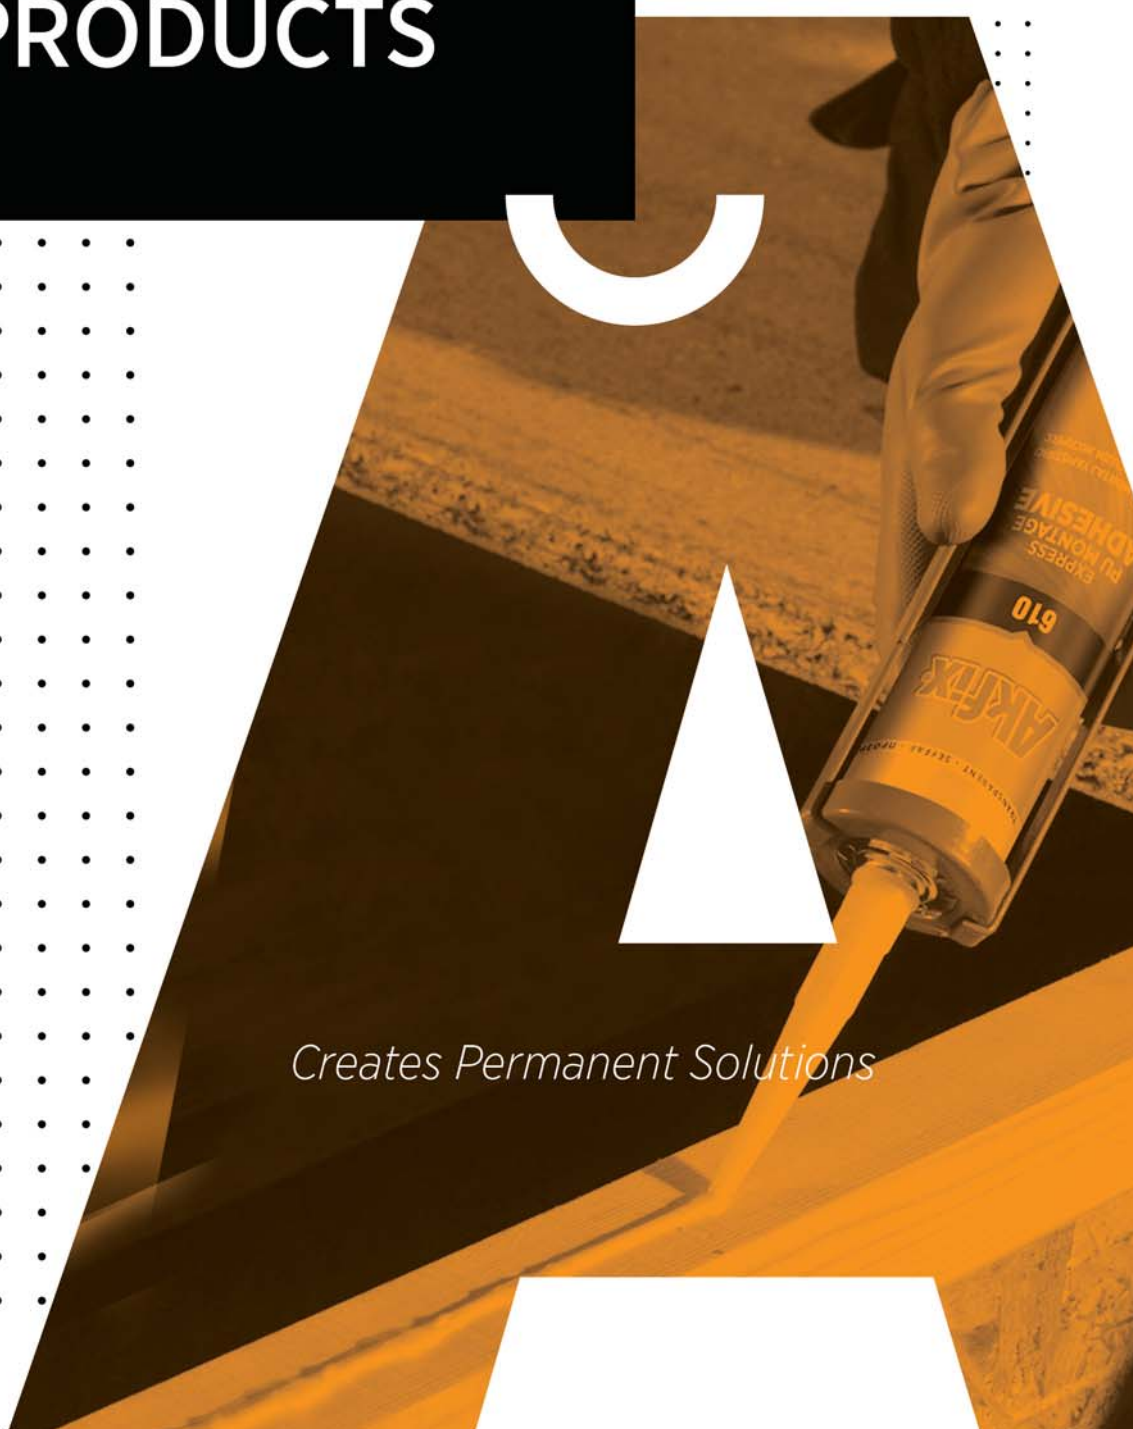

*Creates Permanent Solutions*



## ALLBOND MS HIGH TACK

ALL MATERIALS & ALL SURFACES

MS polymer-based, one component, high quality and professional adhesive with high adhesive strength and initial tack. It is suitable for bonding heavy building materials without the use of clamps and/or fixing tape.

### FEATURES

High initial tack. Eco-friendly, free from isocyanate, solvent, acids and halogens. Excellent primerless adhesion to numerous porous and non-porous substrates. Excellent elasticity, no bubble formation, waterproof, no shrinkage, over-paintable.

### APPLICATION AREAS

It is specially developed as a universal adhesive for bonding various building materials. It is suitable for elastic bonding of panels, profiles and other pieces on the most common substrates such as: stone, concrete, mirrors, glass, plasterboard, PU, PVC, polyester, plastics, enamel, ceramic, copper, lead, zinc, aluminium, metals, R.V.S., wood, HPL and cement fibre panels etc. Common application areas are: Wall cladding elements and ceiling panels. Sound isolation panels (mineral wool, wood-wool cement & plastic foams). Thermal isolation panels (PUR, PIR, PS). Casings and frames in building construction. Wooden and plastic laths, ornaments and frames. Doorsteps, window sills, skirting boards and cover plates. Complete construction elements (such as roofing and facade elements) in frames.



"Conforms to the requirements of VOC content specifications in LEED credit EQc4.1 'Low-emitting products' of SCAQMD rule 1168."



## ALLBOND MS FAST&STRONG

ALL MATERIALS & ALL SURFACES

MS polymer-based, one component, hybrid joint-filling sealant with very high built-up of strength. It does not contain solvent or isocyanate and can be applied for multi purposes.

### FEATURES

Very high final strength. Waterproof. Becomes plasto-elastic with air humidity. Eco-friendly, free from isocyanate, solvent, acids and halogens. Over-paintable. No bubble formation. Waterproof. Becomes plasto-elastic with air humidity. No shrinkage. Does not need primer (preliminary test recommended). Excellent elasticity and very good adhesion strength.

### APPLICATION AREAS

Sealing and bonding of the most common substrates such as natural stone, hard PVC, concrete, wood, glass, metals etc.



"Conforms to the requirements of VOC content specifications in LEED credit EQc4.1 'Low-emitting products' of SCAQMD rule 1168."

## MS410 CURTAIN RAIL ADHESIVE

One component, high quality and professional adhesive with high adhesive strength and initial tack. It is suitable for bonding curtain rails and curtain track systems without the use of clamps and/or fixing tape.

### FEATURES

One component, fast curing, easy to use adhesive foam. Bonding blocks and stones during construction works. Powerful adhesion to concrete and stone variations. Suitable to use at interior and exterior applications. Remarkable resistance to weather conditions. Doesn't form thermal bridges, thanks to the excellent thermal insulation. More economical, practical and easy to use. Minimum expansion during drying period. After dried, no further expansion or shrinkage. No more extra burden or weight to building. Usable at low temperature like 0°C. It does not contain any propellant gases which are harmful to the ozone layer.

### APPLICATION AREAS

Bonding structural blocks of non-bearing interior walls. For use where fixed, permanent positioning of stone or concrete products is desired. Concrete pavers/slabs. Segmental retaining walls and columns. Cast stone copings. Landscape blocks and bricks. Polystyrene foam board. Cellular lightweight concrete elements. Ornamental precast. Natural & manufactured stone. Brick, aerated block, cinder block, bims block, gypsum block and gypsum panel bonding. Applications where minimum expansion is needed. Mounting and isolation for frames of windows and doors.



"Conforms to the requirements of VOC content specifications in LEED credit EQc4.1 'Low-emitting products' of SCAQMD rule 1168."



## 960 PU ADHESIVE FOAM STRAW



One component aerosol polyurethane adhesive foam curing swiftly with moisture. Providing very fast and powerful adhesion for various construction materials, especially highly recommended for heat insulation systems.

### FEATURES

Powerful adhesion of polystyrene heat panels (XPS and EPS). Ready to mechanical fastening in two hours. More economical. Ready to use in aerosol can. Up to 9m<sup>2</sup> heat insulation panel adhesion for each can. Minimum expansion during drying period. After dried, no further expansion and shrinkage. A lighter material compared to plaster which used in heat insulation systems. No more extra burden or weight to building. Depending on the humidity and temperature. Fire Class: E (According to EN 13501-1. It refers to B2 to DIN 4102). Usable at low temperature like 0°C. It does not contain any propellant gases which are harmful to the ozone layer.

### APPLICATION AREAS

Best for mounting heat insulation panels and filling voids during adhesive application. Also advised for wooden type construction material bonding to concrete, metal etc. Applications needed minimum expansion. Mounting and isolation for frames of windows and doors.



## 960P PU ADHESIVE GUN FOAM

One component aerosol polyurethane adhesive foam curing swiftly with moisture. Providing very fast and powerful adhesion for various construction materials, especially highly recommended for heat insulation systems.

### FEATURES

Powerful adhesion of polystyrene heat panels (XPS and EPS). Ready to mechanical fastening in two hours. More economical. Ready to use in aerosol can. Up to 14m<sup>2</sup> heat insulation panel adhesion for each can. Minimum expansion during drying period. After dried, no further expansion and shrinkage. A lighter material compared to plaster which used in heat insulation systems. No more extra burden or weight to building. Depending on the humidity and temperature. Fire Class: E (According to EN 13501-1. It refers to B2 to DIN 4102). Usable at low temperature like 0°C. It does not contain any propellant gases which are harmful to the ozone layer.

### APPLICATION AREAS

Best for mounting heat insulation panels and filling voids during adhesive application. Also advised for wooden type construction material bonding to concrete, metal etc. Applications needed minimum expansion. Mounting and isolation for frames of windows and doors.



## 962P CONCRETE, STONE & BRICK ADHESIVE

Professional type, gun grade, ready to use adhesive foam. Specially designed to bond construction elements like aerated blocks and different kind of bricks.

### FEATURES

One component, fast curing, easy to use adhesive foam. Bonding blocks and stones during construction works. Powerful adhesion to concrete and stone variations. Suitable to use at interior and exterior applications. Remarkable resistance to weather conditions. Doesn't form thermal bridges, thanks to the excellent thermal insulation. More economical, practical and easy to use. Minimum expansion during drying period. After dried, no further expansion or shrinkage. No more extra burden or weight to building. Usable at low temperature like 0°C. It does not contain any propellant gases which are harmful to the ozone layer.

### APPLICATION AREAS

Bonding structural blocks of non-bearing interior walls. For use where fixed, permanent positioning of stone or concrete products is desired. Concrete pavers/slabs. Segmental retaining walls and columns. Cast stone copings. Landscape blocks and bricks. Polystyrene foam board. Cellular lightweight concrete elements. Ornamental precast. Natural & manufactured stone. Brick, aerated block, cinder block, bims block, gypsum block and gypsum panel bonding. Applications where minimum expansion is needed. Mounting and isolation for frames of windows and doors.





## 965 ROOF & TILE PU ADHESIVE

One component aerosol polyurethane adhesive foam curing swiftly with moisture and specifically formulated for laying roofing tiles, thanks to its characteristics of greater mechanical strength and adhesion to concrete and brick and insulating materials such as polystyrene and cork.

### FEATURES

Powerful adhesion of roofing tiles. Instant adhesion and roof fixing within two hours. Exceptional resistance to wear and to the action of the wind. Not form thermal bridges, thanks to the excellent thermal insulation. Thanks to its modern chemical formulation, it is highly thixotropic. More economical. Ready to use in aerosol can. Up to 14 m<sup>2</sup> roofing tile adhesion for each can. Minimum expansion during drying period. After dried, no further expansion and shrinkage. No more extra burden or weight to building. High yield up to 55 liters, depending on the humidity and temperature. Fire Class: E (According to EN 13501-1. It refers to B2 for DIN 4102). Usable at low temperature like 0 °C. It does not contain any propellant gases which are harmful to the ozone layer.

### APPLICATION AREAS

Used best for laying of tiles and tiles construction of insulation on roof repair and consolidation of roofing. Laying wooden elements and insulation panels for thermal and acoustic insulation purposes. Seals and fittings in general where minimum expansion is needed. Mounting and isolation for frames of windows and doors.



## 966P SUBFLOOR PU ADHESIVE

One-component, premium, polyurethane-based new generation adhesive formulated for floor joists, subflooring, trusses, particle board, OSB and decks. Subfloor Adhesive provides superior adhesion to lumber, plywood, concrete, metals, masonry and other substrates even if they are frozen or slightly damp.

### FEATURES

Its revolutionary high yield – replaces up to 25 standard 280 ml cartridges of traditional caulk adhesive. Extremely strong bond. Adheres to dry, wet, treated and frozen lumber. Reduces nail pops, call backs and squeaks. Saves application time and money. Provides thermal and sound insulation.

### APPLICATION AREAS

Many construction application on lumber, plywood, concrete, metals, masonry, steel, metals, fiberglass and more. Bonding floor joists, subflooring, trusses and other wood floor sheathing.



## 510 NO NAIL PU MONTAGE ADHESIVE

One-component, fast curing polyurethane based adhesive. Thanks to its bonding capability to all common building materials with high bond strength, you will no longer need nail or screw.

### FEATURES

Low press time. Extremely high bond strength on various substrates such as wood, MDF, concrete. Fast curing. Good filling properties. Thixotropic, non-sag, ideal for vertical joints. Easy to use. Nonshrinking. Excellent resistance to moisture and weather conditions. Solvent-free. Usable in slightly wet substrates.

### APPLICATION AREAS

It is suitable for use in construction and repair applications where a permanent strong bond is required between porous-porous and porous-nonporous surfaces. It can be used for bonding to various kinds of construction materials such as wood, MDF, concrete, metal, polystyrene and polyurethane foam, marble, granite and ceramic etc.





## 610 PU EXPRESS MONTAGE ADHESIVE

One-component, fast curing polyurethane based adhesive. It combines high bond strength with fast curing. It's used to bond almost all common building materials.

### FEATURES

Fast curing. Low press time. Transparent. Extremely high bond strength on numerous substrates. Thixotropic, non-sag, ideal for vertical joints. Low consumption, economical. Good filling properties. Conforms to D4 according to DIN EN 204. Easy to use. Very good resistance to chemicals. Excellent resistance to moisture and weather conditions. Nonshrinking. Low odour. Usable in slightly wet substrates.

### APPLICATION AREAS

It is suitable for use in construction and repair applications where a permanent strong bond is required between porous-porous and porous-nonporous surfaces. It can be used for bonding to various kinds of construction materials such as wood, MDF, concrete, metal, polystyrene and polyurethane foam, marble, granite and ceramic etc.



## 612J ALUMINUM CORNER JOINT EXPRESS

One-component, fast curing polyurethane based adhesive with high adhesion properties which is exclusively developed for bonding aluminum corner angles, along with all kinds of aluminum materials in building material's corner joint applications.

### FEATURES

Perfect bonding capability to aluminum surfaces. Low pressing time. Easy to use both in vertical and horizontal surfaces with non-sag properties. Low consumption, economical. Not effected by the moisture. Resistant to weather conditions and chemicals. For both interior and exterior usage. Also provides good adhesive strength with various substrates.

### APPLICATION AREAS

Aluminum brackets, doors and windows. Bonding of aluminum materials to most common substrates like, wood, MDF, concrete, metal, polystyrene and polyurethane foam, PVC, granite. Marble, ceramic. Also can be used for bonding most building materials.



## 616C PU EXPRESS CONSTRUCTION ADHESIVE


A polyurethane based adhesive used in construction and buildings to bond different substrates with high adhesion strength. Cures in 24 hours in both exterior and interior application.

### FEATURES

Suitable for wide range of construction materials. Usable in both exterior and interior areas. Low press time of 15 minutes. Low consumption, economical. Not effected by the moisture. Resistant to weather conditions and chemicals. No odor.

### APPLICATION AREAS

In construction, restoration, repair and decoration works. With wide range of porous and non-porous material like wood, plywood, concrete, brick, PVC, granite, marble, natural stone, glass, polycarbonate, metal, ceramic etc. Also good for mounting isolation, decorative polystyrene and wall panels.

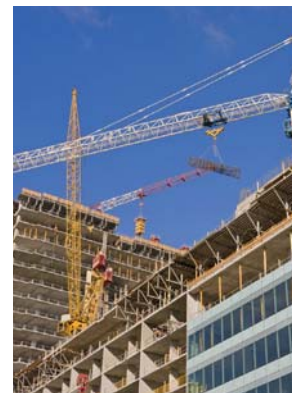

## PA360

### PUR WOOD MARINE ADHESIVE

One-component, fast curing liquid polyurethane adhesive. It possesses high water resistance and bonding strength.

#### FEATURES

Easy application, low viscosity. High bond strength. Water resistant (D4-DIN EN204). Can be used on slightly humid surfaces. Resistant to temperature extremes. Resistant to moisture and chemicals.

#### APPLICATION AREAS

Fixing and gluing wooden elements to other various porous and non-porous elements as wood, metal, concrete, polystyrene foam etc. Furniture and boat production. All bonding applications that need a high water resistance.



**D4**  
DIN EN 204

Waterproof



## 360FC

### FAST CURE PUR WOOD GLUE

One-component, fast curing liquid polyurethane adhesive. It possesses high water resistance and bonding strength.

#### FEATURES

Easy application, low viscosity. High bond strength. Fast drying. Water resistant (D4-DIN EN 204). Can be used on slightly humid surfaces. Resistant to temperature extremes. Resistant to moisture and chemicals.

#### APPLICATION AREAS

Fixing and gluing wooden elements to other various porous and non-porous elements as wood, metal, concrete, polystyrene foam etc. Furniture and boat production. All bonding applications that need a high water resistance.

**D4**  
DIN EN 204

Waterproof



## PA370

### EXPRESS PU WOOD ADHESIVE

One-component, fast curing liquid polyurethane adhesive. It possesses high water resistance and bonding strength.

#### FEATURES

Fast curing. Low press time. Transparent. Extremely high bond strength on numerous substrates. Conforms to D4 according to DIN EN 204. Easy to use. Very good resistance to chemicals. Excellent resistance to moisture and weather conditions. Nonshrinking. Low odour. Useable in slightly wet substrates.

#### APPLICATION AREAS

Fixing and gluing wooden elements to other various porous and non-porous elements as wood, metal, concrete, polystyrene foam etc. Furniture and boat production. All bonding applications that need a high water resistance.



**D4**  
DIN EN 204

Waterproof



## 480 PEDESTAL ADHESIVE

Single component, polyurethane based adhesive particularly designed for installation of access flooring systems.

### FEATURES

Provides excellent green strength, Bonds Metal to Concrete, Suitable for both indoor and outdoor applications, Water resistant when cured, Excellent gap-filling properties, Paste like consistency, One component, no mixing required.

### APPLICATION AREAS

Suitable for adhesion of raised access floor pedestals to floors. Suitable on metal, concrete, chipboards, plywood, fiber reinforced gymnasium and cement boards.



## PA550 PVC MEMBRANE PRESS ADHESIVE

New generation adhesive for fixing PVC, PP, PET, ABS onto especially MDF by the vacuum or membrane press process for the manufacture of high gloss furniture in kitchen, bathroom or wardrobe shutters and doors. Membrane Press Adhesives are can be used together with Akfix hardeners creating a cross linked film with high adhesion properties and very good heat and water resistance.

### FEATURES

Easy to apply, has a low viscosity. Quick drying. Water resistant. Synthetic and natural materials, excellent bonding. Low and high temperatures do not lose strength. Moisture and chemical resistant. Heat-sensitive film with high adhesion for the low activation temperature. Not harm the environment and human health.

### APPLICATION AREAS

Permanent adhesion for durable fixation. Excellent heat resistance to prevent delaminating in hot conditions. Outstanding bonding properties on most synthetic and natural materials. Enabling you to get perfect and smooth surface for high gloss finishes. High initial bond strength and low activation temperature for heat sensitive films.



**D4**  
DIN EN 204

Waterproof

## HB260 HYBRID FLOORING ADHESIVE (WOOD & PVC)

Single component universal elastic flooring adhesive based on hybrid technology. Thanks to hybrid technology it is solvent, isocyanate and water free. It provides exceptional performance on strips and mosaic parquet, plank floors and wood block floors on porous and non-porous substrates.

### FEATURES

Ready to use: No mixing required. Provides high quality indoor air; Non-toxic, Eco-friendly. Form stable peaks when applied by a notched trowel. Suitable for under-floor heating systems. Permanently flexible. Rapid buildup of final bonding strength. Solvent, Isocyanate and water free. Very easy to apply.

### APPLICATION AREAS

Suitable for bonding many different types of floors including strips and mosaic parquet, plank floors and wood block floors on porous and non-porous substrates.



## HM220

### EVA HOT MELT STRAIGHT EDGE BANDING ADHESIVE

General purpose synthetic resin and EVA based hotmelt adhesive of thermoplastic characteristic.

#### FEATURES

Hot-Melt is used for curved edge banding, coating and massive adhesion operations on all kinds of domestic and foreign edge banding machines, also manually operated machines. It is short open time adhesive. Appropriate when immediate bonding is required. Environmentally friendly. Economical. High green strength. Non-sticky surfaces. Odourless. Easy to use.

#### APPLICATION AREAS

It is recommended that ambient temperature should be above 15°C, air moisture 65-75% and material moisture 8-10% during application, and the adhesive should spread throughout one side of the object to be adhered.



## HM226

### EVA HOT MELT CURVE EDGE BANDING ADHESIVE

Synthetic resin and EVA based hot melt adhesive of thermoplastic characteristic which is developed specifically for curved edge banding purposes.

#### FEATURES

Hot-Melt is used for curved edge banding, coating and massive adhesion operations on all kinds of domestic and foreign edge banding machines, also manually operated machines. It is short open time adhesive. Appropriate when immediate bonding is required. Environmentally friendly. Economical. High green strength. Non-sticky surfaces. Odourless. Easy to use.

#### APPLICATION AREAS

Environment temperature must be around 15°C during the application process. Adhesive must be applied to one surface of the material to be adhered. Air humidity should be 65-75% and product humidity should be 8-10%.

120°C  
140°C



## HM774

### EVA HOT MELT STRAIGHT EDGE BANDING ADHESIVE

Synthetic resin and EVA based hot melt adhesive of thermoplastic characteristic that gives perfect results with straight edge banding works.

#### FEATURES

Hot-Melt is used for straight edge banding, coating and massive adhesion operations on all kinds of domestic and foreign edge banding machines, also manually operated machines. It is short open time adhesive. Appropriate when immediate bonding is required. Environmentally friendly. Economical. High green strength. Non-sticky surfaces. Odourless. Easy to use.

#### APPLICATION AREAS

Environment temperature must be around 15°C during the application process. Adhesive must be applied to one surface of the material to be adhered. Air humidity should be 65-75% and product humidity should be 8-10%.



190°C  
210°C

## HM788

### EVA HOT MELT STRAIGHT EDGE BANDING ADHESIVE

Synthetic resin and EVA based hot melt adhesive of thermoplastic characteristic that gives perfect results with straight edge banding works where lower softening point and fast bonding is needed.

#### FEATURES

Hot-Melt is used for straight edge banding, coating and massive adhesion operations on all kinds of domestic and foreign edge banding machines, also manually operated machines. It is short open time adhesive. Appropriate when immediate bonding is required. Environmentally friendly. Economical. High green strength. Non-sticky surfaces. Odourless. Easy to use.

#### APPLICATION AREAS

Environment temperature must be around 15°C during the application process. Adhesive must be applied to one surface of the material to be adhered. Air humidity should be 65-75% and product humidity should be 8-10%.



180°C  
200°C



## D2

### D2 PVA GLUE SUPER FRAME WORK

Water based adhesive based on polyvinyl acetate homopolymer emulsion. It is specially formulated to conform to EN 204 (D2).

#### FEATURES

High bond strength on numerous substrates. Water based. Easy application. Dries transparent.

#### APPLICATION AREAS

Suitable for bonding wood, decorative laminates, chipboard, blockboard etc. which have limited exposure to high humidity



## D3

### D3 PVAc WHITE GLUE SUPER FRAME WORK

Ready to use water resistant wood adhesive based on polyvinyl acetate homopolymer emulsion. It is specially formulated to conform to EN 204 (D3).

#### FEATURES

Conforms to D3 according to DIN EN 204. Excellent bond strength on hard, and soft woods. Water based. Easy application

#### APPLICATION AREAS

Suitable for gluing all types of wood, wooden materials and flat laminates. Wood to wood, soft- and hardboard, synthetic resin board and chipboard. Suitable for fixing paper, cardboard, paper or textile-backed PVC cloth to wood and board. May also be used to bond outdoor timber constructions such as window-frames and external doors. Particularly suitable for moisture-resistant bonds which have to fulfil high demands.





## C900

### POLYESTER CHEMICAL ANCHOR

Polyester injection mortar for general purpose for solid and hollow supports having a short cure time. It is suitable for use in concrete, perforated bricks and cavity blocks in a wide range of applications.

#### FEATURES

Suitable for solid and hollow structures. High solid content. Easy to extrude and to inject. Thixotropic, can be applied in vertical and horizontal direction. Fast curing.

#### APPLICATION AREAS

Low to Medium-load applications in solid and hollow supports. Fixing of; Gates, balustrades, roller blinds, panes, antennas, consoles, cable trays etc.



## C920

### EASF CHEMICAL ANCHOR (STYRENE-FREE)

High performance styrene free epoxy acrylate injection mortar for solid and hollow supports having a short cure time. It is suitable for use in concrete, stone, perforated bricks and cavity blocks in a wide range of applications.

#### FEATURES

Suitable for rods and reinforcing bars in plain and hollow structures. Styrene free and very low odour. Easy to extrude and to inject. Thixotropic, can be applied in vertical and horizontal direction.

#### APPLICATION AREAS

Heavy load-carrying attachments in solid stone and concrete. Repair mortar or adhesive mortar for concrete components. Attachment of anchor rods, threaded collars, reinforcement bars, profiles etc. Medium-load applications in hollow-bricks. Fixing of; Wooden constructions, metal constructions, metal profiles, sanitary fittings, pipe connections, projecting roofs, facades, cable trays, railings, staircases, gates, window elements.



## C950

### PURE EPOXY CHEMICAL ANCHOR

Heavy duty epoxy injection mortar for solid base materials. It works in dry, damp and flooded holes with a fast curing time.


#### FEATURES

Works in damp and flooded holes. No shrinkage, can be used in oversized holes. Suitable for reinforcing bars in plain structures. Styrene free, very low odour. Thixotropic, can be applied in both vertical and horizontal directions. Fast curing

#### APPLICATION AREAS

Heavy load-carrying attachments in solid stone and concrete. Repair mortar or adhesive mortar for concrete components. Attachment of anchor rods, threaded collars, reinforcement bars, profiles etc. Medium-load applications in hollow-bricks.

- Fixing of;
- Wooden constructions - Metal constructions - Metal profiles - Sanitary fittings - Pipe connections - Projecting roofs - Facades - Cable trays - Railings - Staircases - Gates - Window elements

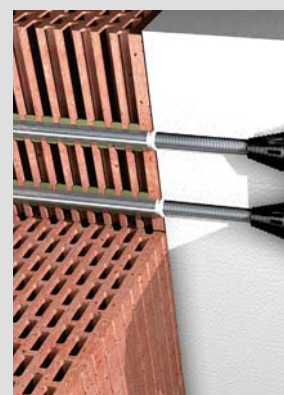

## 310 MONTAGE ADHESIVE

Water-based adhesive used for bonding numerous building materials. It is particularly suitable for DIY users due to solvent-free content and high bonding strength.

### FEATURES

Acrylic dispersion based. Good gap-filling capacity on rough surfaces. Suitable for both indoor and outdoor applications. Weatherproof. Paintable. Low odour. Solvent-free.

### APPLICATION AREAS

Bonding materials such as wood, non-polished stones, concrete, plaster, tiles, panels, synthetic building materials etc. Mounting wooden construction elements, wood and plaster panels, plaster ornaments. Mounting decorative wooden trimmings. Repairing cracks in plaster. Quick repairs on walls and plaster.

Suitable surfaces: MDF, particleboard, wood, polystyrene foam, concrete, masonry, tile, ceramic, stone, plasterboard.



## 312P PANEL ADHESIVE (XPS, EPS, and PLASTER BOARD)

Panel adhesive is an acrylic based adhesive with high initial strength designed for the mounting of the xps, eps, plaster boards and light weight decoration materials.

### FEATURES

High initial power. Both vertical and horizontal application. Waterborne. No odor & solvent. Paintable.

### APPLICATION AREAS

Installation of the xps, eps, plaster board, polystyrene and decorative panels on various building materials. Bonding of wooden structural elements. The installation of moldings, paneling, baseboards and drywall material. Bonding of tiles, bricks, foam, felt and similar materials.



## 320C CORNICE ADHESIVE

A Premium formula, with excellent initial adhesion strength that is utilized in assembly of the polystyrene cornice sheets. Also provides good performance with plasterboards and decoration materials.

### FEATURES

High initial grab. Both vertical and horizontal application. Waterborne. No odor & solvent. Paintable.

### APPLICATION AREAS

For assembly of the polystyrene decorative cornices and panels. Suitable for the substrates such as ceramic tiles, bricks, foams, felts etc. For the adhesion of plasterboards and ornamental materials. For the adhesion of the wooden construction elements.



## 705 UNIVERSAL FAST ADHESIVE

An adhesive set which consists of high viscosity cyanoacrylate adhesive and activator.

### FEATURES

High bonding strength. Suitable for use on vertical surfaces as it will not drip or slump. It is particularly suited to bonding difficult substrates which have a porous or uneven nature since it increases bonding strength by preventing the adhesive to be absorbed by the surface.

### APPLICATION AREAS

It is suitable for the bonding of a very wide range of materials, including acidic surfaces (thanks to activator) and some porous ones, where rapid bonding times are required. Suitable for MDF, wood, chip wood, rubber, most plastics, leather and other common substrates. Especially suitable for the applications where cure speed needs to be accelerated. Although Akfix 705 has a degree of gap filling ability, it is generally recommended for use on close-fitting parts and fairly smooth, even surfaces.



[www.akfix.com/fastadhesive](http://www.akfix.com/fastadhesive)



## 707 SHOE & LEATHER FAST ADHESIVE

Two part special set consist of a high viscosity cyanoacrylate adhesive and activator used especially in shoe repair for bonding leather, rubber and wood.

### FEATURES

Very fast bonding. High adhesive strength. Thanks to its high viscosity formula, it can be used in vertical places without pour and splash. Activator makes it possible and incredibly fast to bond even porous surfaces.

### APPLICATION AREAS

Repair of the leather, rubber, heel and stout leather parts of the shoe. Perfect company in daily life for bonding leather, rubber and wood.



## 702 SUPER GLUE

Low viscosity superfast instant glue based on cyanoacrylate adhesive. It is excellent where extremely fast cure is required.

### FEATURES

Immediate bond. Very high bond strength after a few seconds.

### APPLICATION AREAS

Suitable for rubber, metals, ceramic and many plastics.



## 303 SUPER GLUE

Low viscosity superfast instant glue based on cyanoacrylate adhesive. It is excellent where extremely fast cure is required.

### FEATURES

Immediate bond. Very high bond strength after a few seconds.

### APPLICATION AREAS

Suitable for rubber, metals, ceramic and many plastics.



## C103 DEBONDER GEL

A gel with a relatively low evaporation rate that attacks and dissolves cured or uncured cyanoacrylate adhesive from unwanted areas.

### FEATURES

Cyanoacrylate glue remover quickly softens and dissolves cured and uncured adhesive from unwanted areas. Clings well to vertical surfaces. Does not contain any methylene chloride.

### APPLICATION AREAS

Used in debonding incorrectly bonded parts or in cleaning adhesive residues from laminated MDF, metal and some plastics and rubber surfaces. Preliminary test is necessary before using on plastics and paints as Debonder-Gel may be incompatible with certain plastic and paints.



## C105 DEBONDER SPRAY

An aerosol product with high penetration properties that attacks and dissolves cured or uncured cyanoacrylate adhesive from even most inaccessible surfaces.

### FEATURES

Easy spray usage. It can penetrate into even most inaccessible surfaces. Does not contain any methylene chloride.

### APPLICATION AREAS

Used in debonding the incorrectly bonded parts or in cleaning adhesive residues from laminated MDF, metal and some plastics and rubber surfaces. Preliminary test is necessary before using on plastics and paints as Debonder-Spray may be incompatible with certain plastic and paints.



## 202 UNIVERSAL CONTACT ADHESIVE TOLUENE FREE

Fast curing, high strength adhesive based on chloroprene rubber.

### FEATURES

Rapid curing. Provides flexible bond. Good frost resistance. Moisture resistant.

### APPLICATION AREAS

It is mainly used in upholstery, shoe and textile industry for bonding of the most common materials such as; Rubber, fabric, leather, artificial leather, cork, metal, chipboard etc. to itself or to several other substrates.



## 204 UNIVERSAL CONTACT ADHESIVE

Fast curing, high strength adhesive based on chloroprene rubber.



### FEATURES

Rapid curing. Provides flexible bond. Good frost resistance. Moisture resistant.

### APPLICATION AREAS

It is mainly used in upholstery, shoe and textile industry for bonding of the most common materials such as; Rubber, fabric, leather, artificial leather, cork, metal, chipboard etc. to itself or to several other substrates.



## HM208 HOT MELT STICK

Translucent, high viscosity and slow setting general purpose glue stick.

### FEATURES

Designed for use on the paper, cloth and plastic related applications. Ideal for bonding wood, metal, fabric, ceramics, masonry, leather, cardboard. Appropriate when immediate bonding is required. Environmentally friendly. Gap-filling. High green strength. Non-sticky surfaces. Odourless. Easy to use.

### APPLICATION AREAS

Ideal for household repairs, DIY tasks, craft and hobby works.



8  
mm

11  
mm

## R305 PVC CEMENT

Adhesive containing stabilized Tetrahydrofurane is suitable for joints, resistant to shear strain of pressure pipes (e. g. drinking water and gas pipes) with uPVC fittings, and gluing cable conduits, drain pipes etc in accordance with the recommendations of the Plastic Pipe Association.

### FEATURES

High pressure resistance (16 bars). Water resistant. Chemical resistant especially to inorganic acids. Fast curing, maximum leak protection. Excellent gap-filling properties. Easy bonding even on large surfaces. Hot and cold water pipes (60°C). Resistant to bacteria. The products conforms to following standards. DIN 16970. BS 4346. ASTM-D 2564. NEN 7106

### APPLICATION AREAS

Specifically indicated for: Bonding cement uPVC pipes and accessories in pressure systems up to 16 PN. Bonding pipes and accessories in waste systems according to the following: PVC-U plastics piping systems for soil and waste discharge (low and high temperature). ABS plastics piping systems for soil and waste discharge (low and high temperature). PVC-C plastics piping systems for soil and waste discharge (low and high temperature).



## R306 PVC CEMENT THF FREE

Special solvent cement for joining rigid PVC pipes and accessories pressure systems, according to BS EN 14814 and BS EN 14680. Specifically indicated to bond thermoplastic piping systems that conform to BS EN 1452, BS EN 1455, BS EN 1566 and BS EN 1329. Adhesive with CE Marking for thermoplastic piping systems for fluids under pressure (PN16). Designed also to be used in non pressure systems such as PVC and ABS.

### FEATURES

Very high initial forging speed. High resin content gives a good filling capacity in diametrical gaps. THF free. Gel consistency and excellent fluidity. High thixotropic index – prevents it from dripping upon application. Acts as a real chemical welding system for PVC, due to its composition. Easy to apply; it does not run or form “tears” inside the fixed pipes. The fixed joints present resistance and ageing characteristics comparable to those of cement PVC. Complies with requirements of the standard BS-EN14680 and BS-EN14814.

### APPLICATION AREAS

Specifically indicated for:  
Bonding cement PVC-U pipes and accessories in pressure systems up to 16 PN according to BS EN 14814 “Adhesives for thermoplastic piping systems for fluids under pressure. Specifications”. Specifically indicated to bond thermoplastic piping systems that conform to BS EN 1452 and BS EN 1329. Bonding pipes and accessories in waste systems according to the following standards:  
PVC-U plastics piping systems for soil and waste discharge (low and high temperature) BS EN 1329. ABS plastics piping systems for soil and waste discharge (low and high temperature) BS EN 1455. PVC-C plastics piping systems for soil and waste discharge (low and high temperature) BS EN 1566.



## G400 GRANITE AND MARBLE ADHESIVE

Two component polyester resin mastic for bonding and filling of marble, granite and natural stone.

### FEATURES

Fast drying properties. Available in liquid and solid form. Resistant to alkalis and diluted acid solutions. Temperature resistance of cured adhesive is between -10 °C and +100°C. Bonded surfaces are ready to be used after 2 hours. No color change, cracking or shrinkage during hardening period. Become hard and perfectly polishable after drying.

### APPLICATION AREAS

Bonding of natural stones like marble, travertine etc. Bonding of concrete, granite, wood surfaces.



## G500 GRANITE AND MARBLE ADHESIVE LIQUID

Polyester based, two component liquid adhesive, used for filling and bonding of marble, granite, natural stone, artificial marble, onyx and ceramic like materials.

### FEATURES

Fast curing (2-3 minutes at 20°C). Easy to process with its creamy consistency. Perfect shine after mechanical polishing. High chemical resistance. Excellent resistance against wearing. High bonding power even in high temperatures.

### APPLICATION AREAS

Bonding of natural stones like marble, travertine, artificial marble, onyx etc.



## 710 STONE & MARBLE FAST ADHESIVE

High viscosity cyanoacrylate and activator, which is developed especially for bonding materials such as natural stone, marble, granite and decorative stones.

### FEATURES

Ability to bond rapidly in seconds. High bonding power. Thanks to its high viscosity formula, it can be used in vertical places without pour and splash. Activator makes it possible and incredibly fast to bond even porous surfaces.

### APPLICATION AREAS

Utilized in assembly and repairs of parts such as natural stone, marble, granite, wood, MDF and metal. Preferred especially in the applications which require rapid curing.



## E300 WATERPROOF EPOXY

Fast cure two-component waterproof epoxy adhesive.

### FEATURES

High lap shear strength and durability. Applied and cured under water. Cures without shrinkage and crack. Good gap filling capability. Water and chemical resistant. Paintable and sandable,

### APPLICATION AREAS

Bonding for wood, glass, crystal, ceramic, porcelain, metal, fiberglass. Repairing furniture and household materials.



## E340 QUICK SETTING EPOXY

Fast cure two-component adhesive based on epoxy.

### FEATURES

High lap shear strength and durability. Very fast cure. Cures without shrinkage and crack. Good gap filling capability. Water and chemical resistant. Paintable and sandable,

### APPLICATION AREAS

Bonding for wood, glass, crystal, ceramic, porcelain, marble metal, fiberglass, leather, rubber, fabric and rigid plastic substrates. Sealing electrical components. Repairing furniture and house materials.



## E350 STEEL EPOXY & QUICK FIX PUTTY



### STEEL

Versatile, highly durable and very strong epoxy adhesive. Easy to apply, fast cure and excellent adhesion strength in 5 minutes. Because of its gap filling capability, it can also be used on rough and incompatible surfaces.

### FEATURES

Very fast cure. Cures without shrinkage and crack. Good gap filling capability. Machinable. Water and chemical resistant. Paintable and sandable.

### APPLICATION AREAS

Bonding for metal, concrete, wood, glass and ceramic. Use for repairing machinery, appliances, tools, automotive components, pipes. Imbedding bolts and screws into metals, concrete or stone. Sealing electrical components,

### QUICK

Very fast and strong repair putty. It takes the shape of applied surface and material. It can be applied underwater. It works best on metals, wood, glass, masonry, stone, marble and ceramics.

### FEATURES

Quick and easy to use-cut, knead and apply. No waste: only use as much as you need. Can be machined, drilled, tapped, sanded and painted after cure. Can be used on vertical substrates, no sagging. No shrinkage and cracking. Excellent resistance to hydrocarbons, and saline water, oil, solvents, mild acids and alkalies.

### APPLICATION AREAS

It is used to bond and fill cracks on all kinds of metal, masonry, brick, wood, glass, ceramic, fiberglass, stone and marble substrates. It is useful for strong repairs in industries, workshops, appliances, tools, marine, automotive parts, metal joints, construction, pools and cracks in concrete. It is used to seal leaks in pipes, tanks and ductworks and underwater repairing.



## WA400 WALLPAPER & BORDURE ADHESIVE UNIVERSAL

Cellulose and starch based wallpaper adhesive.

### FEATURES

Easy to apply. Allows time for positioning. Makes future removal quick and easy. Dissolves in water with ease. Can be cleaned with a sponge and water.

### APPLICATION AREAS

Sticking wallpapers, pre-pasted borders, posters, placards etc.



## WA500 HEAVY DUTY WALLPAPER ADHESIVE PREMIUM

Premium wallpaper adhesive which is based on cold water dispersible starch derivative.

### FEATURES

Easy to apply. Thanks to quick dissolving adhesive, viscosity rise quickly. Allows time for positioning. Makes future removal quick and easy. Dissolves in water with ease. Can be cleaned with a sponge and water. Contains anti-fungal & bacterial protection.

### APPLICATION AREAS

Suitable for hanging most common types of wallcoverings including paper backed, vinyl coated, textured, embossed etc."





# UNIVERSAL FAST 705 ADHESIVE



## BONDS WITHIN SECONDS

An adhesive set which consists of high viscosity cyanoacrylate adhesive and activator.

Suitable for MDF, wood, chip wood, rubber, most plastics, leather etc.



# 03

# SEALANT

## PRODUCTS

*Creates Permanent Solutions*

## ALLBOND MS FLEXI

Neutral, highly elastic, one component MS based joint sealant. It is a low modulus sealant suitable for both indoor and outdoor applications

### FEATURES

Highly thixotropic: Suitable for horizontal and vertical joints. Low modulus can withstand extreme joint movement. Eco-friendly, free from isocyanate, solvent, acids and halogens. Excellent primerless adhesion to numerous porous and non-porous substrates. No bubble formation, even in wet and humid conditions. Very good UV resistance. Over-paintable with water based paints. No shrinkage.

### APPLICATION AREAS

Expansion and connection joints in the building industry. Sealing of joints in prefabricated buildings. Movement joints in high rise constructions. Sealing between window and door frames. Where joints have to be painted.



SHORE **A25**

ALL MATERIALS &  
ALL SURFACES



"Conforms to the requirements of VOC content specifications in LEED credit E0c4.1 "Low-emitting products" of SCAQMD rule 1168."



## ALLBOND MS CLEAR


Crystal clear elastic adhesive based on MS polymer.

### FEATURES

Clear, transparent color. Highly thixotropic: Suitable for horizontal and vertical application. Eco-friendly, free from isocyanate, solvent, acids and halogens. Excellent primerless adhesion to numerous porous and non-porous substrates. No bubble formation, even in wet and humid conditions. Over-paintable with water based paints. No shrinkage.

### APPLICATION AREAS

It has a good adhesive strength without primer on most common materials such as aluminum, zinc, galvanized steel, stainless steel, copper, natural stone, concrete, brick, etc. Common application areas are: Transparent and elastic bonding in construction and building applications. Invisible bonding and sealing of glass and other transparent materials in indoor applications



"Conforms to the requirements of VOC content specifications in LEED credit E0c4.1 "Low-emitting products" of SCAQMD rule 1168."

SHORE **A35**

ALL MATERIALS &  
ALL SURFACES

## ALLBOND MS UNIVERSAL

High quality universal hybrid sealant & adhesive based on MS polymer.

### FEATURES

Highly thixotropic: Suitable for horizontal and vertical joints. Eco-friendly, free from isocyanate, solvent, acids and halogens. Excellent primerless adhesion to numerous porous and non-porous substrates. No bubble formation, even in wet and humid conditions. Very good UV resistance. Over-paintable with water based paints. No shrinkage.

### APPLICATION AREAS

Connection joints in sheet metal fabrication, sealing of HVAC systems. Elastic bonding in vibrating construction elements. Sealing of floor joints and low movement wall joints. Sealing joints in containers, cisterns, silos etc.



"Conforms to the requirements of VOC content specifications in LEED credit E0c4.1 "Low-emitting products" of SCAQMD rule 1168."

SHORE **A45**

ALL MATERIALS &  
ALL SURFACES

## ALLBOND MS TEAK DECK CAULKING


One component, non-corrosive, high quality fast curing MS polymer sealant designed for decking applications where UV, extreme weather, long time fresh & salt water resistance and waterproof properties are required. It is also suitable for waterproof sealing of teak wood decks in nautical applications.

### FEATURES

Chemically resistant to fresh water, salt water and diluted acids. UV, ageing, moisture and extreme weather resistance. Eco-friendly, free from isocyanate, solvent, acids and halogens. Highly elastic in low and high temperatures. Excellent primerless adhesion to numerous porous and non-porous substrates. Sandable after curing. Fast curing, low odor and non-sag properties.

### APPLICATION AREAS

MS Teak Deck is designed for sealing of connection joints between teak decks and variety of decking substrates. Outstanding primerless adhesion on joining elements made from wood, concrete, plastic, steel, aluminum, zinc, copper, porcelain, ceramics, PVC, metals, polyester, polycarbonate, natural stone, marble, mirror, glass and porous surfaces. If using for the first time a preliminary test is recommended for plastics before application.

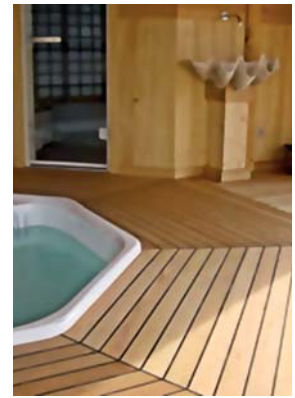

**MS POLYMER**  
BY KANEKA

**A+**  
EN 15055-1  
EN 15055-2

CE  
EN 15055-1  
EN 15055-2

"Conforms to the requirements of VOC content specifications in LEED credit EQc4.1 "Low-emitting products" of SCAQMD rule 1168."



## P625 POLYURETHANE SEALANT CONSTRUCTION

One-component, low-modulus polyurethane sealant that cures on exposure to atmospheric humidity. It possesses excellent adhesion to all typical construction materials such as cement based materials, brick, ceramic, glass, wood, galvanized and painted sheet iron and various plastics.

### FEATURES

Possesses permanent elasticity. No sagging - Thixotropic. No surface tackiness after full cure. Do not pick up dirt. No shrinkage. Enhanced storage stability. Can be applied with hand gun and tooled easily. Paintable. Cures bubble-free. 25% movement capability. Conforms to BS 6920 for the metallic water soluble impurities. Conforms to the requirements of VOC content specifications in LEED credit EQc4.1 "Low-emitting products" of SCAQMD rule 1168.

### APPLICATION AREAS

Expansion joints between many different construction materials. Bonding of roof tiles. Installation of PVC window frames. Connection joints between wood window- and doorframes and walls. Joints between prefabricated construction materials. Sealing and bonding of ventilation ducts, gutters and spouts etc. For expansion joints between pre-cast concrete panels.



**A+**  
EN 15055-1  
EN 15055-2

CE  
EN 15055-1  
EN 15055-2

Conforms to BS 6920 for the metallic water soluble impurities and is suitable for use in drinking water systems.

**SHORE  
A25**

## P635 POLYURETHANE SEALANT CONSTRUCTION

One-component, low-modulus polyurethane sealant that cures on exposure to atmospheric humidity. It possesses excellent adhesion to all typical construction materials such as cement based materials, brick, ceramic, glass, wood, galvanized and painted sheet iron and various plastics.

### FEATURES

Possesses permanent elasticity. No sagging - Thixotropic. No surface tackiness after full cure. Do not pick up dirt. No shrinkage. Enhanced storage stability. Can be applied with hand gun and tooled easily. Paintable. Cures bubble-free. 25% movement capability. Conforms to BS 6920 for the metallic water soluble impurities. Conforms to the requirements of VOC content specifications in LEED credit EQc4.1 "Low-emitting products" of SCAQMD rule 1168.

### APPLICATION AREAS

Expansion joints between many different construction materials. Movement and connection joints in floors. Indoor and outdoor applications for pedestrian and traffic areas. Joints between prefabricated construction materials. Sealing and bonding of ventilation ducts, gutters and spouts etc. For expansion joints between pre-cast concrete panels. Meets the requirements of ISO 11600 F 25 LM.



**SHORE  
A35**

**A+**  
EN 15055-1  
EN 15055-2

CE  
EN 15055-1  
EN 15055-2

Conforms to BS 6920 for the metallic water soluble impurities and is suitable for use in drinking water systems.

## 647FC

### PU METAL SEALANT FAST CURING (AUTOMOTIVE)

One-component, high-modulus polyurethane sealant that cures on exposure to atmospheric humidity and must be used when fast curing is essential. It possesses excellent adhesion to sheet iron, aluminum, stainless steel, lead, copper, ceramic, glass, wood and various plastic materials.

#### FEATURES

Fast Curing. Permanently flexible. Non-sag consistency. Non-sticky / does not pick up dirt. Improved storage stability. Easy to gun, can be easily smoothed. Paintable.A

#### APPLICATION AREAS

Body construction of cars, containers, caravans etc. Sealing and bonding of ventilation ducts, gutters and spouts etc. Sealing of sheet metal seams. For vibration reduction in all type of sheet metal assembly works. Sealing against water, air, gas and dust. Conforms to the requirements of VOC content specifications in LEED credit EQc4.1 "Low-emitting products" of SCAQMD rule 1168. Meets the French VOC requirements for class A+



## P645

### PU METAL SEALANT (AUTOMOTIVE&CONSTRUCTION)

One-component, high-modulus polyurethane sealant that cures on exposure to atmospheric humidity. It possesses excellent adhesion to sheet iron, aluminum, stainless steel, lead, copper, ceramic, glass, wood and various plastic materials.

#### FEATURES

Permanently flexible. Non-sag consistency - Exceptional thixotropy. Non-sticky / does not pick up dirt. Improved storage stability. Easy to gun, can be easily smoothed. Over-paintable. Conforms to the requirements of VOC content specifications in LEED credit EQc4.1 "Low-emitting products" of SCAQMD rule 1168. Meets the French VOC requirements for class A+.

#### APPLICATION AREAS

Body construction of cars, containers, caravans etc. Sealing and bonding of ventilation ducts, gutters and spouts etc. Sealing of sheet metal seams. For vibration reduction in all type of sheet metal assembly works. Sealing against water, air, gas and dust.



SHORE  
A45

## 638TD

### TEXTURED PU SEALANT

One-component, non-sag, moisture curing elastomeric PU sealant designed for sealing concrete applications where high elasticity and textured appearance are required.

#### FEATURES

Textured appearance fits well on rough, irregular, stucco and concrete surfaces. Low VOC, less than 30 g/liter. Possesses permanent elasticity. No sagging - Thixotropic. No surface tackiness after full cure, does not pick up dirt. No shrinkage. Can be applied with hand gun and tooled easily. Paintable.

#### APPLICATION AREAS

On both vertical and horizontal joints in walls, around window and door frames. Weatherproofing of joints between concrete, masonry, brickwork etc.



SHORE  
A50

## 900N NEUTRAL MIRROR SILICONE



High performance neutral cure silicone which is particularly designed for bonding the mirrors in all kinds and sizes without harming the mirror. A bonded mirror is safer because there is no risk of large pieces of glass falling in the event of breakage.

### FEATURES

Highly elastic, +/-25% movement capability. Excellent primerless adhesion to numerous porous and non-porous substrates. Safer mirror construction with non-corrosive properties. Permanently elastic. Fast curing. 100% Silicone, solventless. Solvent free, very low odor. Adjustable, easy to apply. High viscosity non slump formula. One component moisture-cured. Excellent tooling properties. Resistant to temperature extremes (-60 °C to +180 °C).

### APPLICATION AREAS

For fixing and bonding of mirrors in some places such as fitness centers, restaurants, cafes, hotels, and offices where mirror wall is required. For glazing works. Sealing applications where a low odor is required.



## 910N ROOF & PLUMBING NEUTRAL SILICONE

One-component, high quality Neutral curing 100% silicone sealant designed for applications where long term durable plumbing, spouting, roofing, flashing, cladding and guttering are required. It is suitable for sealing of connection

### FEATURES

Outstanding adhesion without primer on joining elements made from brick, stone, concrete, wooden, plastic, steel, aluminum, zinc, porcelain, ceramic, PVC, metal, glass and porous surfaces. Highly elastic, +/-25% movement capability. UV, water and weather proof. Non-corrosive neutral cure. Fast curing. Low odor. Interior/exterior use. Easy to apply. Chemically resistant. Non-sag.

### APPLICATION AREAS

Joints and cracks in gutters, flashing, downpipes, lap joints, skylights and cladding walls. Vent and HVAC ducts systems.



## 905N NEUTRAL SILICONE (BUILDING & CONSTRUCTION)

A neutral cure, high performance silicone sealant designed for gap filling and sealing in a wide range of use in building and construction. It combines the advantages of outstanding adhesion to building materials with its non-corrosive and odorless curing.

### FEATURES

100% solventless silicone. Excellent weatherproof and UV resistant. No Cracking or Shrinking. Water resistant. Very low odor and noncorrosive. Excellent flexibility and adhesion to numerous porous and non-porous. Substrates for large scale construction and glazing applications. Resistant to temperature extremes (-60 °C to +180 °C). Fast curing, low modulus, high elasticity. High viscosity non slump formula.

### APPLICATION AREAS

Non-corrosive joint sealing for walls, windows and doors. Glass to glass and glass to aluminium sealing. Sealing applications in kitchens and bathrooms. Sealing of connection joints in building industry (brick, wall, concrete, PVC, wood, glass etc.)



## 905E

### NEUSEAL NEUTRAL SILICONE



Neutral cure, silicone sealant, exclusively created for weather sealing and glazing application. It forms highly resistive weatherproof seal on windows and building facades. It is also suitable for sealing applications on the surfaces where acetoxy silicone is not desired.

#### FEATURES

Provides permanent elasticity. Outstanding adhesion to many porous and non-porous substrates. Exceptional resistance to temperature extremes. Very low odor and non-corrosive to metals. Excellent UV resistance. Not affected by exposure to sunlight, rain, snow and maintains it over many years. Excellent flexibility. Fast curing, low modulus, high elasticity. High viscosity non slump formula.

#### APPLICATION AREAS

Premium weather sealing and joint sealing for walls, windows and doors. Sealing and mounting window and door frames. Sealing applications of marble, stone and other porous substrates. Vent and HVAC ducts systems. Outstanding primerless adhesion on joining elements made from brick, stone, concrete, wooden, plastic, steel, aluminum, zinc, porcelain, ceramic, PVC, metal profiles, glass and porous surfaces. Preliminary test is recommended for some plastics if necessary.



## 915N

### WEATHERSEAL NEUTRAL SILICONE

A neutral cure, premium performance silicone sealant, exclusively produced for weather sealing and glazing application. It forms highly resistive weatherproof seal on windows and building facades.

#### FEATURES

Provides permanent elasticity thanks to its 100% silicone formula. Not affected by exposure to sunlight, rain, snow and maintains it over many years. Exceptional resistance to temperature extremes. Very low odor and noncorrosive. Excellent flexibility and adhesion to numerous porous and non-porous. Substrates for large scale construction and glazing applications. Fast curing, low modulus, high elasticity. High viscosity non slump formula.

#### APPLICATION AREAS

Premium weather sealing and joint sealing for walls, windows and doors. Sealing and mounting the window and door frames. Sealing applications of marble, stone and other porous substrates. Sealing of connection and expansion joints.



## 918N

### NEUTRAL SANITARY SILICONE


One component, high quality moisture curing Neutral silicone sealant designed for sanitary applications where non-corrosive, moldproof and chemically resistant properties are required. It is suitable for sealing of connection joints between a variety of substrates in wet areas.

#### FEATURES

Mold & mildew proof. Resistant to cleaning agents. Maintains its flexibility at temperature extremes. Highly elastic, +/-25% movement capability. UV, water and weather proof. Non-corrosive neutral cure. Fast curing. Low odor. Interior/exterior use. Non-sag.

#### APPLICATION AREAS

Sealing applications of joints around bathtubs, showers and sinks. Sealing of joints between tiles, ceramic, metal sheets and walls. Sealing expansion joints in tile walls. Sealing of connection joints between walls and floors. Sealing of joints between glazing and supporting substrates.

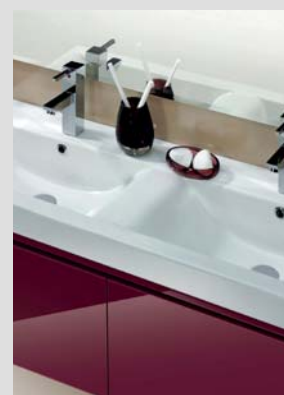



## 917N IG SEALANT NEUTRAL

One- part silicone sealant developed for use as a secondary sealant in a dual-sealed insulating glass unit. Insulating glass sealant can bond the individual components, forming a weather-resistant unit.

### FEATURES

Excellent unprimed adhesion to glass and metal substrates, such as galvanized steel, stainless steel. One-component formulation minimizes waste and downtime by eliminating base purging and static mixer maintenance. Consistently non-slump, permitting automated glazing. Non-corrosive by products. Fast curing formula. Resistant to temperature extremes (-60 °C to +180 °C).

### APPLICATION AREAS

Primarily used as a secondary sealant in production of dual-sealed insulating glass unit production. Insulating glass silicone sealant can be also recommended with insulating glass units incorporating specialty glass types.



## 100S 100% SILICONE SANITARY

A neutral cure, high performance silicone sealant designed for gap filling and sealing in a wide range of use in building and construction. It combines the advantages of outstanding adhesion to building materials with its non-corrosive and odorless curing.

### FEATURES

100% Silicone, solventless. One component, moisture-cured. Highly Resistive to mold formation. Excellent primer less adhesion to numerous porous and non-porous substrates. Excellent weather ability in direct sunlight, rain, snow and ozone. Resistant to temperature extremes (-60 °C to +180 °C). Fast curing. Low modulus, high elasticity. Outstanding resistance to mildew and fungus. Does not crack or discolor. Withstands detergents, cleaning agents and chemicals. Acetoxo curing system. Conforms to the requirements of VOC content specifications in LEED credit EQc4.1 "Low-emitting products" of SCAQMD rule 1168.

### APPLICATION AREAS

Sealing of connection joints. Weather seal applications. Glazing works. Sanitary joints: Sealing applications in kitchens and bathrooms.



## 100D SHOWER CABINE KITCHEN&BATHROOM SILICONE

Specially formulated for use in production and installation of shower cabins which has no solvent and shows excellent mold resistant properties. It's a superior sealant for sealing and glazing applications featuring excellent adhesion and durability.

### FEATURES

Conforms to ISO EN 11600-F-20LM. 100% silicone, does not contain any solvent. Cures very fast. Mold-Proof. No shrinkage. Stays bright and clean. Outstanding resistance to mildew and fungus. Resistant to temperature extremes and aging. Does not crack or discolor. Withstands detergents, cleaning agents and chemicals. Acetoxo curing system. Conforms to the requirements of VOC content specifications in LEED credit EQc4.1 "Low-emitting products" of SCAQMD rule 1168.

### APPLICATION AREAS

Glazing and fixing in shower cabins during production. Filling joints between tiles, tub and shower cabin during installation. Filling joints between bath tubs and tiles after production. Waterproofing sinks.





## 100AQ AQUARIUM NON-TOXIC SILICONE



Non-toxic, solvent-free silicone sealant for use in aquarium construction and glazing applications. It's a high-quality acetic curing system based silicone sealant featuring excellent adhesion to glass and many other non-porous surfaces.

### FEATURES

100% silicone. Very good bonding strength. Rapid curing. Non-toxic to fish. One component, cures with atmospheric moisture. Keep its elasticity at low and high temperatures. Does not crack, discolour or shrink. Resistant to many chemicals. Resistant to UV radiation.

### APPLICATION AREAS

Bonding, sealing and repairing of aquariums.



## 100E UNIVERSAL SILICONE SEALANT

One-component silicone sealant for a range of general sealing and glazing applications. It provides a strong adhesion and suitable for use on common non-porous building materials.

### FEATURES

Stays permanently elastic after curing. Remains flexible in low and high temperatures. Resistant to temperature extremes. Resistance to aging, cracking and discoloring.

### APPLICATION AREAS

Sealing around windows and doors. Sealing in DIY applications. On bathroom, kitchen and plumbing applications. Connection and expansion joints on glass, porcelain, steel etc. Sealing electric, telephone etc. sockets and switches.



## AC590 DUCT SEAL ACRYLIC

Fiber reinforced, water based duct sealant.

### FEATURES

Excellent workability. Very low VOC content. Permanently flexible. No drip nor sag. Low shrinkage. Indoor and outdoor use.

### APPLICATION AREAS

Suitable for sealing metal to metal joints to prevent air leaks in air-conditioning, refrigeration, ventilation and air distribution systems.



## AC592 ACOUSTIC SEALANT



Permanently flexible, acrylic water based acoustical sealant especially formulated to reduce sound transmission from leaking through joints and edges of all types of wall partitions in soundproofing projects. It also provides sound dampening, smoke and moisture barrier between different construction substrates.

### FEATURES

Reduces sound transmission. Stays flexible for high acoustic performance. Adheres to wide range of materials including wood, brick, foamboard, concrete, greenboard, drywall, cementboard etc. Non-flammable. Eco-friendly: Low VOC and low odor. Easy water cleanup. Easy application with non-sag properties. Over paintable.

### APPLICATION AREAS

Provides an effective acoustic barrier for sealing gaps, perimeter joints, and partitions between two soundproofing materials including plasterboard, drywalls, foamboard where an acoustic barrier is required. Sealing and bonding joints between walls and the floor or ceiling. Also suitable to use in perimeter of recessed lighting, plumbing pipes, air ducts, electrical conduits, windows, and doors. Adheres to numerous substrates including wood, brick, masonry, plasterboard, foamboard, concrete, gypsumboard, greenboard, drywall, cementboard, metal studding and other insulation boards etc.



EN 15651-1



## AC600 PINK SEAL

Multipurpose acrylic sealant formulated to provide a dry time indicator.

### FEATURES

Pink in color and becomes white after drying. Very low VOC content. Water-proof after curing. Very easy application. Over paintable. Can be used on all porous surfaces such as brick, concrete, wood etc.

### APPLICATION AREAS

Sealing of low and medium movement joints between various construction materials (wood, concrete, brick etc.). Sealing joints between windows, walls, doors etc. Filling cracks in walls and on ceilings.



EN 15651-1

## AC603 CLEAR SEAL

Plasto-elastic acrylic adhesive and sealant that becomes crystal clear upon curing.



### FEATURES

Becomes transparent when cured. Very low VOC content. Water-proof after curing. Can be used on all porous surfaces such as brick, concrete, wood etc. Easy to apply.

### APPLICATION AREAS

Suitable for sealing applications in bathroom and kitchen. Can be used as an adhesive for wood, bricks, concrete etc.



EN 15651-1

## AC604

### ULTRA LIGHT GAP FILLER

One-component, water based acrylic sealant designed for general purpose gap filling and repairing wall before painting. It provides permanently water repellent layer after curing. Especially suitable for filling low movement joints and cracks between construction materials such as brick, concrete, wood, drywalls and plasterboards, etc.

#### FEATURES

Flexible, crack proof. Outstanding adhesion to concrete, masonry and brick, etc. Very low VOC content. Interior/exterior use. Water clean-up. Paintable. UV, water and weather proof. Easy and smooth application.

#### APPLICATION AREAS

Use as wall repair compound on small holes and cracks in wallboard, wood & plaster. Filling low movement joints between various construction substrates such as brick, concrete, wood, drywalls and plaster etc.



## AC605

### ACRYLIC SEALANT

One-component universal acrylic sealant suitable for filling cracks and joints both indoors and outdoors. It's a cost-effective plastic-elastic sealant ideal for particularly static joints.

#### FEATURES

Over paintable. Very low VOC content. Very easy to apply and clean. Water-proof after curing. Can be used on all porous surfaces such as brick, concrete, wood etc. No odour.

#### APPLICATION AREAS

Sealing of low movement joints between various construction materials (wood, concrete, brick etc.). Filling cracks in walls and on ceilings. Sea-ling joints between windows, walls, doors etc.



## AS606

### SILICONIZED SEALANT


One-component acrylic emulsion based sealant reinforced with silicone emulsion. It has superior adhesion and good elasticity.

#### FEATURES

Its siliconized structure, makes it possible to handle movement up to 15%. Water based & Non-toxic. Very low VOC content. Water-proof after curing. Over paintable. Very easy to apply and clean. Can be used on all porous surfaces such as brick, concrete, wood etc. No odour.

#### APPLICATION AREAS

Sealing of low movement joints between various construction materials (wood, concrete, brick etc.) Sealing joints between windows, walls, doors etc. Filling cracks in walls and on ceilings.

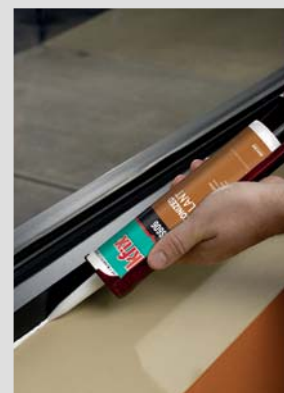

## AS609 ALL SEASONS CAULK SEALANT




One-component general purpose acrylic sealant reinforced with silicone dispersion. AS609 provides superior crack-proof durability and adhesion that prevents air, moisture, insect, dust and dirt from passing through expansion joints and cracks. It is developed for use in all seasons when freeze thaw stability properties and durable flexibility are necessary.

### FEATURES

Freeze thaw stable. Paintable. Interior/exterior use. Permanently flexible, crack proof. Easy water clean-up. Water-proof after curing. Low VOC content. Smooth and easy tooling. Low odor. Excellent adhesion to most porous surfaces such as brick, concrete, wood, drywalls and plaster etc.

### APPLICATION AREAS

Sealing of low and medium movement joints between various construction materials. Sealing window and door frames. Sealing siding and trim. Sealing anywhere a wetter-proof seal is required. Sealing corner joints. Filling cracks in walls and on ceilings.

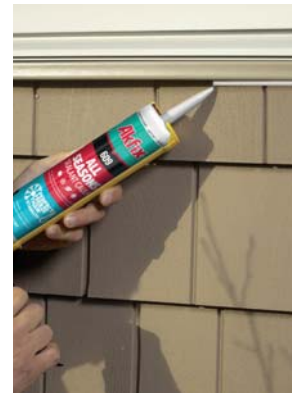

# WALL REPAIR PATCH KIT

Ideal for patching walls, ceilings and nail holes.

## PERMANENT REPAIRING

Small holes, cracks and damaged surfaces as drywall, plaster, stucco and wood.



### Includes:

- Drywall repair compound
- Self-adhesive patch
- Plastic Spreader for applying
- Drywall sanding



# 04 PU FOAM

## PRODUCTS



*Creates Permanent Solutions*



## MAXIMUM STRAW PU FOAM 65L

Low expansion and maximum yield formulation aerosol polyurethane foam especially developed for fixing door&window frames. It yields minimum 100% more foam than straw foams, cures faster and forms easy to cut flexible foam.

### FEATURES

Maximum Yield: Provides 100% more yield than that of standard straw foams. Low-Expansion: Ensures not to bend or bow door and window frames. Decreases foam waste. Fast Cure. Improved Adhesion&Stability: Better non-sagging performance on vertical surfaces. Usable in 4 Seasons: Special formulation allows application at low temperatures (-2 °C). Closed-Cell Structure: Provides effective heat&sound insulation. It does not contain any propellant gases which are harmful to the ozone layer.

### APPLICATION AREAS

Fixing&sealing of door and window frames. Sealing applications where low-expansion is needed. Filling small cavities.



## 850 MEGA PU GUN FOAM 65L

One-component professional PU foam which yields significantly higher volumes. It is used with a special applicator gun.

### FEATURES

High yield up to 65 liters, depending on the humidity and temperature. Excellent adhesion on common construction materials. Economical consumption thanks to precise application. Mould-proof, water-proof and over paintable. It does not contain any propellant gases which are harmful to the ozone layer.

### APPLICATION AREAS

Fixing and insulating of door and window frames. Filling and sealing of gaps, joints and cavities. Filling of penetrations in walls. Insulating electrical outlets and water pipes.



## 872 MEGA PU GUN FOAM 70L

One-component professional PU foam which yields significantly higher volumes. It is used with a special applicator gun.

### FEATURES

High yield up to 70 liters, depending on the humidity and temperature. Excellent adhesion on common construction materials. Economical consumption thanks to precise application. Mould-proof, water-proof and over paintable. It does not contain any propellant gases which are harmful to the ozone layer.

### APPLICATION AREAS

Fixing and insulating of door and window frames. Filling and sealing of gaps, joints and cavities. Filling of penetrations in walls. Insulating electrical outlets and water pipes.





## 940 SAFETY VALVE REUSABLE PU FOAM

PU foam which is never blocked thanks to its mechanical valve.

### FEATURES

Can be re-used repeatedly even if partially used before. Even stored in horizontal or upside-down position the valve is never blocked. Better control of the outflow thanks to special adaptor. High horizontal yield thanks to special design tube. Mould-proof, water-proof and over paintable. It does not contain any propellant gases which are harmful to the ozone layer.

### APPLICATION AREAS

Fixing and insulating of door and window frames. Filling and sealing of gaps, joints and cavities. Filling of penetrations in walls. Insulating electrical outlets and water pipes.



## 805P PU GUN FOAM MULTI PURPOSE

One-component PU foam used with an applicator gun and features higher yield, easier application and reusability. It does not contain any propellant gases which are harmful to the ozone layer.

### FEATURES

Excellent adhesion & filling capacity and high thermal & acoustical insulation value. Economical consumption thanks to precise application. High yield up to 45 liters depending on temperature and humidity. Conforms to fire class B3 according to DIN 4102-1. Mould-proof, water-proof and over paintable.

### APPLICATION AREAS

Fixing and insulating of door and window frames. Filling and sealing of gaps, joints and cavities. Filling of penetrations in walls. Insulating electrical outlets and water pipes.



## 805 PU FOAM MULTI PURPOSE

One-component, moisture-curing and self-expanding aerosol polyurethane foam. It is designed for easy dispensing through the straw adapter included with each can. It does not contain any propellant gases that are harmful to the ozone layer.

### FEATURES

Excellent adhesion & filling capacity and high thermal & acoustical insulation value. Excellent mounting capacity and stability. Adheres to almost all building materials with the exception of surfaces such as polyethylene, Teflon, silicone and surfaces contaminated with oils and greases, mold release agents and similar materials. Mould-proof, water-proof, over paintable. Cured foam dries rigid and can be trimmed, shaped and sanded.

### APPLICATION AREAS

Fixing and insulating of door and window frames. Filling and sealing gaps, joints and cavities. Filling of penetrations in walls. Insulating electrical outlets and water pipes.





## 806 PU GUN FOAM MULTI PURPOSE

One-component, moisture-curing and self-expanding aerosol polyurethane foam. It is designed for easy dispensing through the straw adapter included with each can. As a straw foam, behaves like a gun foam. Straw use but has low expansion like gun use foams. It does not contain any propellant gases that are harmful to the ozone layer.

### FEATURES

Excellent adhesion & filling capacity and high thermal & acoustical insulation value. Excellent mounting capacity and stability. Adheres to almost all building materials with the exception of surfaces such as polyethylene, Teflon, silicone and surfaces contaminated with oils and greases, mold release agents and similar materials. Mould-proof, water-proof, over paintable. Cured foam dries rigid and can be trimmed, shaped and sanded.

### APPLICATION AREAS

Fixing and insulating of door and window frames. Filling and sealing gaps, joints and cavities. Filling of penetrations in walls. Insulating electrical outlets and water pipes.



## 3XL HIGH EXPANDING PU GUN FOAM 65L

One-component professional pu foam which yields significantly higher volumes. It is used with a special applicator gun.

### FEATURES

High yield up 65 liters, depending on the humidity and temperature. Excellent adhesion on common construction materials. Economical consumption thanks to precise application.

### APPLICATION AREAS

Fixing and insulating of door and window frames. Filling and sealing of gaps, joints and cavities. Filling of penetrations in walls. Insulating electrical outlets and water pipes. Instructions: Optimal can temperature +20°C.



## 888P FLEXIBLE PU GUN FOAM

Single-component PU flexible foam used with an applicator gun and features flexibility, high performance, easier application and reusability. It does not contain any propellant gases which are harmful to the ozone layer. The foam has a minimum expansion after application (less than 50%) and is therefore very economical to use. The foam is very elastic and has a very high Acoustic Rating and Thermal Insulation value.

### FEATURES

High elastic recovery ratio. Overcomes extreme physical movements without structural deformation. Shock and impact absorption. Excellent adhesion & filling capacity and high thermal & acoustical insulation value. Economical consumption thanks to precise application. High yield up to 45 liters depending on temperature and humidity. Mould-proof, water-proof and paintable.

### APPLICATION AREAS

Vibrating constructions. Soundproof screen production. Application of soundproofing layer on industrial equipments. Reduction of noise transmission during use as fixing foam. Fixing and insulating of door and window frames. Filling and sealing gaps, joints and cavities. Filling penetrations in walls. Filling all joints in roof constructions. Enhancing thermal insulation in heating/cooling systems. Insulating electrical outlets and water pipes.







## 812 PU FOAM MULTI PURPOSE WINTER -12°C

One-component, moisture-curing and self-expanding PU foam especially developed for applications at temperatures of as low as -12 °C.

### FEATURES

High yield&stability and adequate pressure at frost temperatures. Excellent adhesion on most materials. Very good filling capacity. High thermal&acoustical insulation value. Resistant to moisture, heat, water and many chemicals.

### APPLICATION AREAS

Mounting and insulating of door and window frames. Filling and sealing of gaps, joints and cavities. Filling of penetrations in walls. Improving thermal isolation in cooling systems.



## 812P PU GUN FOAM MULTI PURPOSE WINTER -12°C

One-component PU foam used with an applicator gun and developed for applications in temperatures below to -12 °C.

### FEATURES

Can be applied at frost temperatures. Excellent adhesion& filling capacity and high thermal&acoustical insulation value. Economical consumption thanks to precise application. High yield up to 45 liters. Mould-proof, water-proof and over paintable.

### APPLICATION AREAS

Fixing and insulating of door and window frames. Filling and sealing of gaps, joints and cavities. Filling of penetrations in walls. Insulating electrical outlets and water pipes.



## 885 MEGA PU GUN FOAM WINTER -25°C 70 L

One-component professional PU foam which yields significantly higher volumes. It is used with a special applicator gun.

### FEATURES

High yield up to 70 liters, depending on the humidity and temperature. Excellent adhesion on common construction materials. Economical consumption thanks to precise application. Conforms to fire class B3 according to DIN 4102-1. Mould-proof, water-proof and over paintable. It does not contain any propellant gases which are harmful to the ozone layer.

### APPLICATION AREAS

Fixing and insulating of door and window frames. Filling and sealing of gaps, joints and cavities. Filling of penetrations in walls. Insulating electrical outlets and water pipes.





## 807 PU FOAM MULTI PURPOSE WINTER -6°C

One-component, moisture-curing and self-expanding PU foam especially developed for applications at temperatures of as low as -6 °C.

### FEATURES

High yield&stability and adequate pressure at frost temperatures. Excellent adhesion on most materials. Very good filling capacity. High thermal&acoustical insulation value. Resistant to moisture, heat, water and many chemicals.

### APPLICATION AREAS

Mounting and insulating of door and window frames. Filling and sealing of gaps, joints and cavities. Filling of penetrations in walls. Improving thermal isolation in cooling systems.



## 807P PU GUN FOAM MULTI PURPOSE WINTER -6°C

One-component PU foam used with an applicator gun and developed for applications in temperatures down to -6 °C.

### FEATURES

Can be applied at frost temperatures. Excellent adhesion& filling capacity and high thermal&acoustical insulation value. Economical. Consumption thanks to precise application. High yield up to 45 liters. Conforms to fire class B3 according to DIN 4102-1. Mould-proof, water-proof and over paintable.

### APPLICATION AREAS

Fixing and insulating of door and window frames. Filling and sealing of gaps, joints and cavities. Filling of penetrations in walls. Insulating electrical outlets and water pipes.



## 800C FOAM CLEANER

Removes fresh PU foam and cleans the PU foam gun adapter after the application. Cleans surfaces, clothes, window&door frames and prevents the foam cure in the gun adapter.

### FEATURES

Powerful solvent based aerosol cleaner for removing uncured PU foam (straw and gun adapter foam). Designed especially for cleaning the gun adapter of foam. Cleaner has a spray activator for removing the foam from the gun adapter. It can be used in all positions. Propellant gas is not harmful to the ozone layer.

### APPLICATION AREAS

Cleaning of the gun adapter. Cleaning of the valves of the PU Foam Aerosol. Removal of uncured foam.



# FENCE POST FIX


**2 Component, fast setting, pre-proportioned polyurethane foam system designed specifically for fixing ground posts.**

**No more handling heavy bags of concrete,**

**No water is required,**

**No messy concrete mixing.**

**Sets in 3-5 minutes (depending on temperature)**

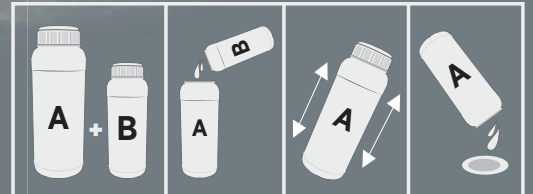

**EASY STRONG FAST**

# COATINGS APPLICATION AREAS

1 Concrete Substrate


2 Joint Sealant Polyurea

3 Spray PU Foam

4 Polyurea

5 Base Coat Liquid Membrane

6 Polyaspartic Polyurea

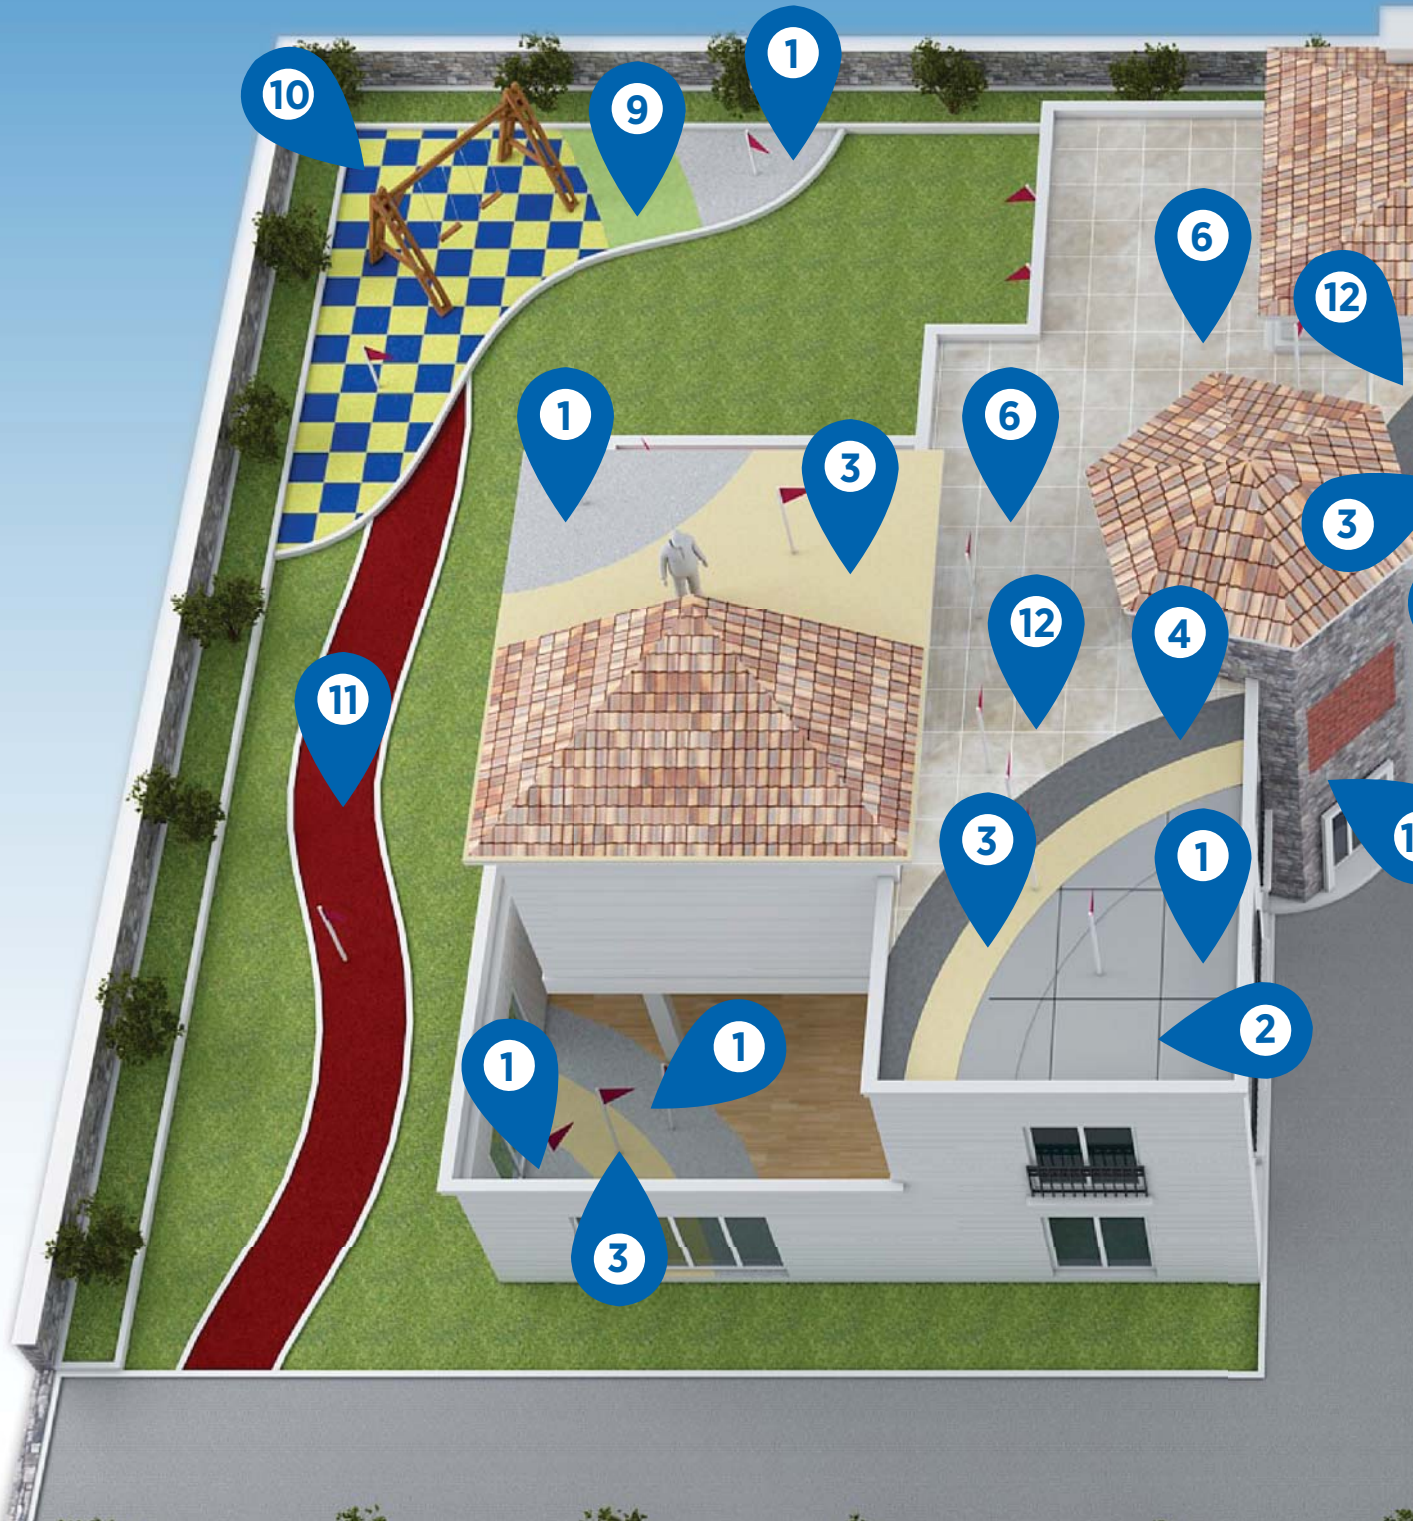

7 Top Coat Liquid Membrane

8 Aliphatic Polyurea


9 Rubber Tile Adhesive

10 Press Rubber Binder

11 Pour in Place Rubber Binder

12 Ceramic

13 PU Wood Imitation Panel

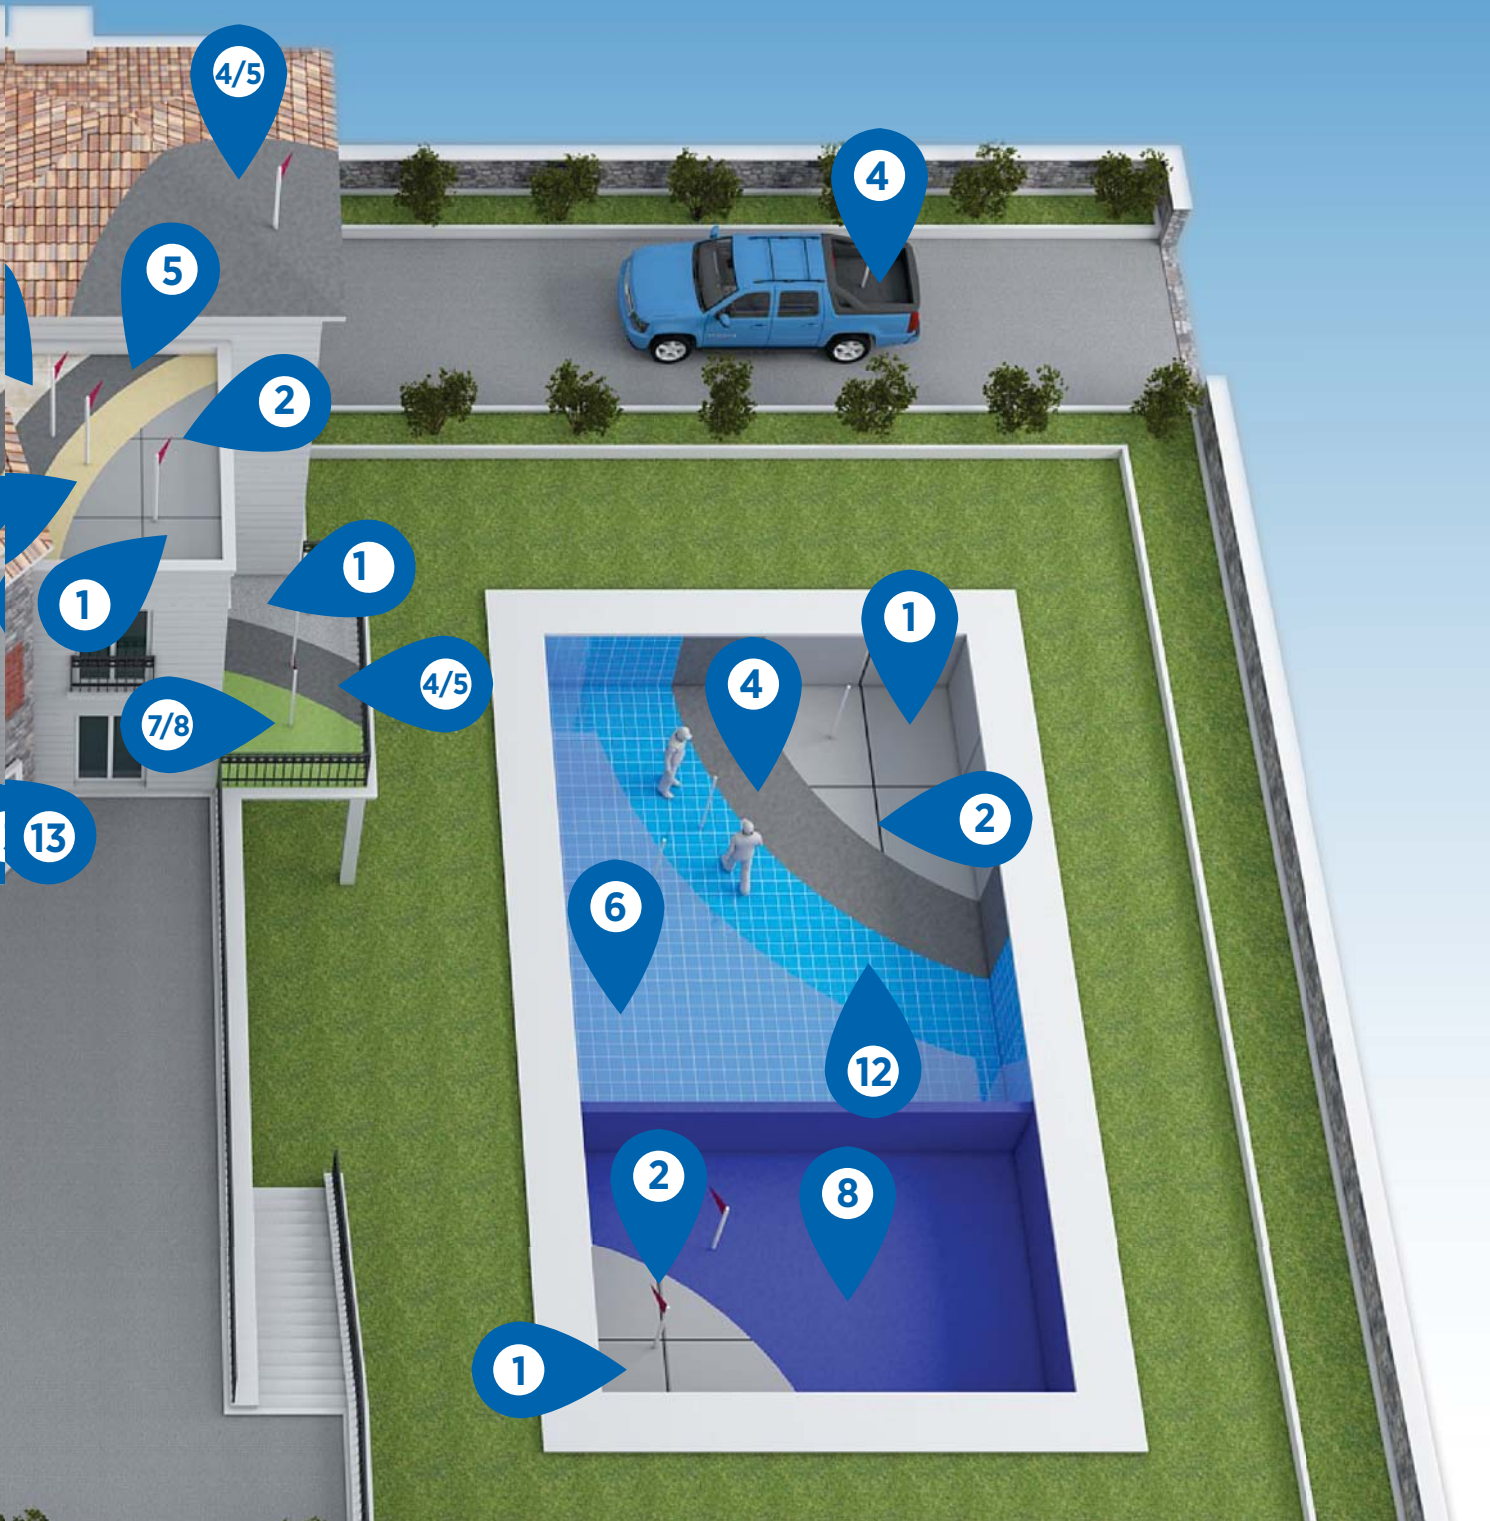

# 05 COATINGS

WATERPROOFING AND  
HEAT INSULATION SYSTEM  
PRODUCTS

*Creates Permanent Solutions*



## 907N EPDM SILICONE SEALANT

One component, neutral curing, high performance silicone sealant specially developed for bonding and sealing of EPDM sheets.



### FEATURES

Moisture curing. Very good adhesion on porous and nonporous surfaces including EPDM. Resistance to weather conditions. Fast curing. High elasticity. %100 Silicone, solvents

### APPLICATION AREAS

Bonding of EPDM sheets to each other. Sealing between EPDM sheets and many different building surfaces.



## 602 BITUM SEALANT

Solvent-based plasto-elastic bituminous sealant, reinforced by fibres, for gluing and reparations on bituminous surfaces. After curing a permanent flexible mass is formed.

### FEATURES

Immediate and permanent adhesion on all common construction materials (such as brick, concrete, lead, zinc, tiles, isolation panels, certain plastics, etc...) Can be applied under humid conditions. It is thixotropic and therefore cannot drip, flow or spill and makes no threads. Free from asbestos. Remains flexible after processing and vulcanization. Resistant to moisture. Economic in use. Inflammable (when used properly). Highly insulating. Protects against rust and moisture.

### APPLICATION AREAS

Waterproof sealing of joints, seams, chimneys, ventilation tubes, drainpipes, etc. Adhesive for synthetic materials, tiles, concrete, rubber, insulating panels etc. Sealing seams in wooden ships or boats.



## 640SL SELF LEVELING PU SEALANT

One-component self-leveling polyurethane sealant ideal for horizontal applications. Its elasticity allows it to absorb continual movements of the structure caused by thermal changes without problems of cracking.

### FEATURES

One component, no mixing required. Self-leveling consistency, easy to apply in horizontal joints. Possesses permanent elasticity. High adhesion strength. Capable of ±25% joint movement. Paintable.

### APPLICATION AREAS

Used for sealing of horizontal joints. Interior and exterior areas. Expansion joints between many different construction materials. Control joints. Industrial floors. Driveways/Garages, sidewalks, decks.



## POLYUREA 1044 STANDARD PURE


Very fast set, 2-component, 100% pure flexible coating derived from a reaction of an isocyanate prepolymer and an amine terminated resin blend. This aromatic pure polyurea has been designed to protect and coat concrete, metal, wood, ceramic, geotextile surfaces. It is moisture and temperature insensitivity, allowing application in problematic ambient conditions. The material must be applied utilizing high pressure, heated plural component spray proportioning equipment.

### FEATURES

100% solid, VOC free, no solvents. No catalyst. Fast reactivity and fast return to service time. Seamless and jointless coating. Little or no odor. Excellent thermal stability. Water resistant. Excellent adhesion on concrete, steel, aluminum, plastics, fibers, wood, foam etc. Excellent flexibility. Non sensitivity to temperature and humidity. Excellent chemical resistance. Excellent impact and abrasion resistance. Anticorrosive. Very good tensile and structural strength. UV, chlorine and saltwater resistant. Variable application thickness possible. Broad color spectrum.

### APPLICATION AREAS

General water isolation – pools, swimming pools, ponds, membranes, waste water treatments, manholes, sewer -lining , roofs. Floors –industrial floors, hospitals, factory, auto parks, garage. Truck bed liners. Construction – roads, bridges, railways, high speed railways, tunnels, airports. Marine industry.

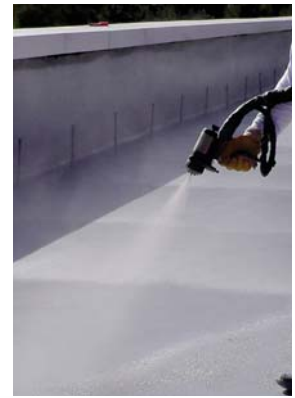

Tested according to EN 1186 Migration testing on Food Contact Materials and found in compliance with regulation EU No 10/2011 with amendments



## POLYUREA 1045 ECO PURE

Very fast set, 2-component, pure flexible coating derived from a reaction of an isocyanate prepolymer and an amine terminated resin blend. This aromatic pure polyurea has been designed to protect and coat concrete, metal, wood, ceramic, geotextile surfaces. It is moisture and temperature insensitivity, allowing application in problematic ambient conditions. The material must be applied utilizing high pressure, heated plural component spray proportioning equipment.

### FEATURES

100% solid, VOC free, no solvents. No catalyst. Fast reactivity and fast return to service time. Seamless and jointless coating. Little or no odor. Excellent thermal stability. Water resistant. Excellent adhesion on concrete, steel, aluminum, plastics, fibers, wood, foam etc. Excellent flexibility. Non sensitivity to temperature and humidity. Excellent chemical resistance. Excellent impact and abrasion resistance. Anticorrosive. Very good tensile and structural strength. UV, chlorine and saltwater resistant. Variable application thickness possible. Broad color spectrum

### APPLICATION AREAS

General water isolation – pools, swimming pools, ponds, membranes, waste water treatments, manholes, sewer -lining , roofs. Floors –industrial floors, hospitals, factory, garage.



## POLYUREA FA 1044 POTABLE WATER & FOOD CONTACT APPROVED

Very fast curing, 2-component aromatic pure polyurea system, 100% solid, flexible coating derived from a reaction of an isocyanate prepolymer and an amine terminated resin blend. This product has been approved for potable water and food contact and especially designed to protect potable water tanks and pipes. The material must be applied utilizing high pressure, heated plural component spray proportioning equipment.

### FEATURES

Suitability for contact with drinking water and food. 100% solid, VOC free, no odor. Does not contain catalyst. Fast reactivity and fast return to service time. Excellent temperature stability. Seamless and jointless coating with high water resistance. Excellent adhesion on concrete, steel, aluminum, plastics, wood, etc. Excellent flexibility. No sensitivity to temperature and humidity. Perfect endurance to chemicals. Very good resistance to impact and corrosion. Very good tensile and structural strength. Variable application thickness is possible.

### APPLICATION AREAS

Potable water storage facilities and tanks. Potable water pipes. Food production and processing plants. Cold storages. Rain storage facilities and sedimentation tanks. Filtration systems. Swimming pools, amusement parks and aquariums



Tested according to EN 1186 Migration testing on Food Contact Materials and found in compliance with regulation EU No 10/2011 with amendments



## POLYUREA FR 1044

### FIRE RETARDANT

Very fast curing, 2-component aromatic pure polyurea system, 100% solid, flexible coating derived from a reaction of an isocyanate prepolymer and an amine terminated resin blend. It's developed for applications which require fire retardant and flame resistant coating. Especially designed to protect and coat concrete, metal, wood, ceramic, geotextile substrates. The material must be applied utilizing high pressure, heated plural component spray proportioning equipment.

#### FEATURES

Fire resistant system. 100% solid, VOC free, no odor. No catalyst. Fast reactivity and fast return to service time. Excellent thermal stability. Seamless and joint less coating with water resistance. Excellent adhesion on concrete, steel, aluminum, plastics, fibers, wood, geotextiles etc. Excellent flexibility. Temperature and moisture insensitive. Excellent chemical resistance. Very good impact and corrosion resistance. Very good tensile and structural strength. Variable application thickness possible. Broad color spectrum

#### APPLICATION AREAS

Floors where fire retardant is necessary , industrial facilities, hospitals, factories, parking lots, garage, transportation. Construction - airports, line striping, ship decks, ship ports and canals. High abrasion applications - oil and gas industry, refineries, petrochemical industry, mining, secondary containment. Energy industry. Waste water treatment plants , tank coating, secondary storage tanks.



## POLYUREA AS 1044

### ANTISTATIC

Very fast curing, 2-component aromatic pure polyurea system, 100% solid, flexible coating derived from a reaction of an isocyanate prepolymer and an amine terminated resin blend. This product is especially applied to surfaces to build up antistatic coatings to avoid risks of ignition due to electrostatic charge. It can be applied to areas where flammable liquids of danger classes are stored. The material must be applied utilizing high pressure, heated plural component spray proportioning equipment.

#### FEATURES

Antistatic property. Excellent tensile and tear resistance. Excellent structural strength. Excellent resistance to chemicals like acid and bases. 100% solid, VOC free, no odor. Contains no catalyst. High hydrolysis resistance. Perfect thermal stability. Seamless and jointless coating with water resistance. Excellent adhesion on concrete, steel, aluminum, ceramic, wood, etc. Temperature and moisture insensitivity. Variable application thickness possible.

#### APPLICATION AREAS

Industrial manufacturing facilities and storage areas. Laboratories. Hospitals and operating room floors. Transportation and truck bed liners. Refineries and gas pipes. Tank coatings.



## POLYUREA HP 1044

### ABRASION RESISTANT POLYUREA

Very fast curing, 2-component aromatic pure polyurea system, 100% solid, flexible coating derived from a reaction of an isocyanate prepolymer and an amine terminated resin blend. This product is especially designed where high abrasion, chemical and corrosion resistance is a necessity. For protecting and coating purposes, this product can be applied on materials like concrete, metal, wood, ceramic and PU foam.

#### FEATURES

Excellent impact and abrasion resistance. Excellent tensile and tear resistance. Excellent structural strength. Excellent resistance to chemicals like acid and bases. 100% solid, VOC free, no odor. Contains no catalyst. High hydrolysis resistance. Perfect thermal stability. Seamless and jointless coating with water resistance. Excellent adhesion on concrete, steel, aluminum, ceramic, wood, etc. Temperature and moisture insensitivity. Variable application thickness possible.

#### APPLICATION AREAS

Floors where high traffic resistance is needed. Parking lots. Water waste treatment plants. Cold storage and loading ramps. Roads, bridge decks, railways and high speed railways, tunnels. Truck bedliners. Shipping containers. Marine industry. Oil and gas industry. Mining industry. Refineries and petrochemical industry,



## POLYUREA AL 1070

### ALIPHATIC

100 % solid, fast curing, 2 component, UV resistance, aliphatic pure polyurea system. Its formulation is designed for maintaining high color stability and preventing discoloration where surfaces are exposed to sun light continuously. While it can be directly used on most surfaces, it also can be used as a top layer on epoxy, polyurethane and polyurea. The material must be applied utilizing high pressure, heated plural component spray proportioning equipment.

#### FEATURES

Excellent UV resistance. 100% color stability. Fast reactivity and fast return to service time. 100% solid, VOC free, no odor. Very good tensile and structural strength. Anticorrosive. High Hydrolysis resistance. Excellent temperature stability. Seamless and jointless coating with high water resistance. Temperature and moisture insensitivity. Excellent adhesion on concrete, steel, aluminum, plastics, wood, etc. Variable application thickness is possible. Broad color spectrum

#### APPLICATION AREAS

Exterior coatings where color stability is required. Swimming pools and water parks. Roofs, garages and parking lots. Airports, shipyards and marina. Wind energy plants. Amusement parks and playgrounds. Decorative designs. Furniture industry



## POLYUREA PA 1070

### POLYASPARTIC SOFT

2 component, UV resistant polyaspartic based polyurea system. This new generation aliphatic polyurea coating system is ideal for applications which require excellent color stability. While this system can be applied as a thin coating, it can also be used as a top layer on top of the existing coating. Additionally, it can be also used to increase the corrosion resistance of the metal substrates . It can be applied with roller, brush or an airless system.

#### FEATURES

Excellent color stability and UV resistance. Suitable for exterior and interior applications. Long working and gel time. Fast service time (open to pedestrian traffic after 3-4 hours). VOC and odor free. Excellent corrosion resistance. High hydrolysis resistance. Wide color range.

#### APPLICATION AREAS

UV and color stable top coat on existing base coat. High color stability and gloss requiring swimming pools. Terraces and roofs. Water parks, playgrounds and decorative applications. Wind turbines.



## POLYUREA PA 1005

### POLYASPARTIC HARD

2 component, UV resistant polyaspartic based polyurea system. This new generation aliphatic polyurea coating system is ideal for applications which require excellent color stability. While this system can be applied as a thin coating, it can also be used as a top layer on top of the existing coating. Additionally, it can be also used to increase the corrosion resistance of the metal substrates . It can be applied with roller, brush or an airless system.

#### FEATURES

Excellent color stability and UV resistance. Safe usage in exterior applications. Long working and gel time. Fast service time (applicable to pedestrian traffic after 2-4 hours). Easy self-spread. VOC free, no odor. High abrasion, impact and corrosion resistance. High hydrolysis resistance. Perfect thermal stability. Seamless and jointless coating with high water resistance. Wide color range.

#### APPLICATION AREAS

UV and color stable top coat on existing base coat. High color stability and gloss requiring swimming pools. Terraces and roofs. Water parks, playgrounds and decorative applications. Wind turbines.



## POLYUREA HB 1010

### HYBRID SYSTEMS

Very fast set, 2-component, 100% solid, flexible hybrid polyurea system. It is derived from a reaction of an isocyanate prepolymer and an amine terminated resin blend. It can be applied as an economic coating alternative to pure polyurea products. This product is VOC free and environmentally friendly. The material must be applied utilizing high pressure, heated plural component spray proportioning equipment.



#### FEATURES

Economic alternative to pure polyurea products. Fast reactivity and fast return to service time. Seamless and jointless coating. 100% solid, VOC free, no solvents. No catalyst. Little or no odor. Excellent thermal stability. Water resistant. Excellent adhesion on concrete, steel, aluminum, plastics, fibers, wood, foam etc. Excellent flexibility. Temperature and moisture insensitivity. Excellent chemical resistance. Excellent impact and abrasion resistance. Anticorrosive. Very good tensile and structural strength. UV, chlorine and salt water resistant. Variable application thickness possible. Broad color spectrum.

#### APPLICATION AREAS

General water isolation-water tanks, pools, swimming pools, ponds, pipes, pipelines, waste water treatments, manholes and sewer linings, roof coatings. Floors - industrial floors, hospitals, factory, parking lots, garage. Truck bed liners. Leisure industry- water parks, aquariums linings, play grounds, theme park and decorative applications.



## PUR 450

### PU WATERPROOFING MEMBRANE

One part, easy to apply, specially formulated polyurethane based, elastic, crack bridging membrane. It cures to form a highly elastic, seamless, waterproof coating with excellent crack bridging properties. Its performance is maintained even at low temperatures.

#### FEATURES

Excellent Adhesion. Easy application. May be applied interior and exterior areas. Crack Bridging. Highly elastic. Economical in use. Silk/matt appearance. Root penetration resistant

#### APPLICATION AREAS

Seamless coating on roofs and concrete structures, which can also be used as a waterproofing membrane on non-trafficked areas. Not suitable for permanent water immersion. Can be applied on concrete, brickwork, asbestos cement, roof tiles, roofing felt etc. For areas with specific official performance requirements, please contact us for product selection.



## T525

### PU TOPCOAT WATERPROOFING MEMBRANE

One component, aliphatic polyurethane based coating material with high permanent elasticity, superior UV resistance, color stability and easy-to-clean surface. It has a special curing system (triggered by the moisture) and does not create bubbles during curing.

#### FEATURES

Excellent adhesion properties. Excellent resistance to abrasion and wear. Prevents color fading and dust formation likely to occur on polyurethane waterproofing materials. Easy application (by roller and airless gun). Forms bright and easy-to-clean surface. UV resistant. Over-walk able after application (light pedestrian traffic). Impervious to water and deicing salts. Uniform structure without any connection edges.

#### APPLICATION AREAS

It is used as a topcoat on polyurethane-based waterproofing materials for protecting waterproofing, giving a decorative appearance to the surface, maintaining brightness of the surface and preventing dust formation.



## POLYUREA JOINT SEALANTS

### JH 1070/JH1080

Self-leveling, 100% solid, flexible, two component, 1:1 volumetric ratio, rapid curing polyurea elastomer joint and crack filler. Cures rapidly and consistently in applications ranging from -10°C to 50°C. Applications can be reopened to vehicle or foot traffic in 1 hour. Recommended time of cure of concrete minimum 30 days prior to installing joint filler or joint sealant.

#### FEATURES

100% solid, VOC free, no solvents. Fast reactivity. Returns project to service in 60 Minutes. Temperature and moisture insensitivity. Excellent thermal stability. Very good tensile and structural strength. Resistant to petrochemicals and chemicals.

#### APPLICATION AREAS

Concrete crack repair and joint filler on; Airports. Roofs. Parking lots and garages. Industrial facilities. Warehouse floors. Manufacturing facilities. Bottling and canning facilities. Food processing facilities. Cold storage facilities.



## POLYUREA HM 80

Hand mixable, self-leveling, 100% solids, flexible, two-component polyurea material. The product has a retarded reaction time (pot life) to permit 'hand mix' use. This superior material designed for joint and crack filling for concrete applications. It works well in adverse temperature conditions and reopen to vehicle and foot traffic just one hour after the application.

#### FEATURES

100% solids, VOC Free. Hand mixable and applicable. Remains flexible in cold temperatures. Open to traffic in 60 minutes. Cures from -18 °C to 65 °C. Temperature and moisture insensitive.

#### APPLICATION AREAS

Concrete crack and repair. Small repairs on existing polyurea coating. Concrete joint filler in; industrial floors, manufacturing facilities, cold storage facilities, airports and garages.



## AQUA ZERO HYBRID WATERPROOFING MEMBRANE

Aquazero; is a premium, liquid and cold applied, one-component silane modified polymer (SMP) based polymer, elastic, waterproofing membrane, free of bitumen, solvent and isocyanates. After fully cured, it forms waterproof, UV resistant surface which also repairs the cracks up to 5mm.

#### FEATURES

Applicable also on damp surfaces. Good resistance to UV, water and moisture. Self-leveling. Paintable. Applicable by brush, roller or a spatula. Provides water vapor permeability, allowing the surface to breathe. Environmental friendly – Free of bitumen, isocyanates and solvents.

#### APPLICATION AREAS

Protection, repair, restoration and waterproofing of the following surface and areas:  
Concrete floor slabs and roofs. Balconies and terraces. Small horizontal movement joints. As a flexible coating of roofs. Protection of Polyurethane Foam Insulation. Waterproofing of Wet Areas (under-tile) in bathrooms, kitchens, balconies, auxiliary rooms, etc.



## PU ADH 325

### ARTIFICIAL GRASS ADHESIVE


Two component, solventless, self leveling, polyurethane based adhesive designed for installation of artificial grass. It is resistant to water, moisture and corrosive materials. Suitable for use in adverse weather conditions.

#### FEATURES

Two component. Excellent bonding to applied surfaces. Suitable for use in adverse weather conditions. Solvent free. No smell. Flexible. Durable.

#### APPLICATION AREAS

Bonding artificial grass sports ground applications. Bonding rubber sheets to different surfaces such as; concrete, hardboard, chipboard. Bonding metal, ceramic, concrete, wood etc.

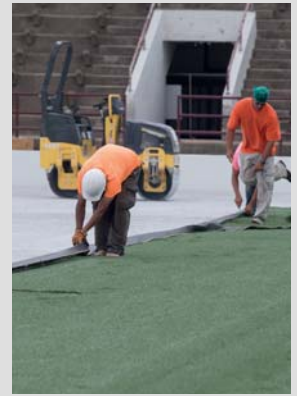

## PU ADH 315

### RUBBER TILE AND PARQUET ADHESIVE

Two component, solventless, polyurethane based rubber tile and parquet adhesive. It is specially designed for rubber tile and wood bonding to concrete surfaces. It is resistant to salt water and most chemicals. Easy applicable, durable and elastic adhesive for various substrates.

#### FEATURES

Two component. Excellent bonding to applied surfaces. Suitable for use in adverse weather conditions. Solvent free. No smell. Flexible. Durable. Mix ratio: 7/1 (A/B, by weight)

#### APPLICATION AREAS

Bonding all types of parquets. Bonding artificial grass sports ground applications. Bonding rubber sheets to different surfaces such as; concrete, hardboard, chipboard. Bonding metal, ceramic, concrete, wood etc.



## PU ADH 305

### RUBBER TILE AND PARQUET ADHESIVE

Two component, solventless, polyurethane based rubber tile and parquet adhesive. It is specially designed for rubber tile and wood bonding to concrete surfaces. It is resistant to salt water and most chemicals. Easy applicable, durable and elastic adhesive for various substrates.

#### FEATURES

Two component. Excellent bonding to applied surfaces. Suitable for use in adverse weather conditions. Solvent free. No smell. Flexible. Durable. Mix ratio: 9/1 (A/B, by weight)

#### APPLICATION AREAS

Bonding all types of parquets. Bonding artificial grass sports ground applications. Bonding rubber sheets to different surfaces such as; concrete, hardboard, chipboard. Bonding metal, ceramic, concrete, wood etc.



## **PUR PRIMER 90** **TRANSPARENT**

Transparent, half-elastic, single component polyurethane primer that penetrates to deep. A solvent-based product. It cures with the moisture of the surface and the humidity in the air.

### **FEATURES**

Excellent adhesion to absorbent surfaces. Highly elastic to meet surface movements. Easy application (by roller or airless gun). Resistant to accumulated water and frost. Economical in use.

### **APPLICATION AREAS**

It is used as a primer on absorbent surfaces like concrete, light concrete, cement, plaster, screed base, mortar, wood, especially before polyurethane based waterproofing materials and polyurethane sealants.



## **PRIMER 80** **MOISTURE TOLERANT EPOXY PRIMER**

Two component, epoxy based, solvent free surface preparation primer which creates moisture barrier on damp surfaces and penetrates to the cracks in the concrete. It penetrates and strengthens the surface of the concrete, reduces pinhole formations and provides a chemically reactive surface to accept coating systems. Coating adhesion force is increased by up to three times that of unprimed concrete.

### **FEATURES**

Excellent adhesion and penetration to damp concrete surfaces. Seals pores and capillaries. Perfect resistance to water, freeze, humidity and harsh weather conditions. Can be used indoor and outdoor applications. Economical.

### **APPLICATION AREAS**

It can be used before polyurea, polyurethane and epoxy coating applications for humidity and water vapor prevention on damp concrete surfaces. To avoid osmosis bubbles that formed via the effect of the pressure from the negative side.



## **PRIMER S80** **STANDARD EPOXY PRIMER**

Two component, solventless, low viscosity, epoxy based surface preparation primer with high penetration property. It is for usage as a primer and correction layer before coatings. Provides excellent adherence on concrete and concrete screed surfaces where surface preparation is made.

### **FEATURES**

Perfect adhesion to porous substrates. Easy application (with roller or airless spray gun). Useable in both exterior and interior areas. Economical.

### **APPLICATION AREAS**

Used as a primer on absorbent surfaces like concrete, lightweight concrete, cement screed, wood before the water insulation materials like polyurea, epoxy and polyurethane based water insulation materials. Impregnates the concrete surfaces to protect it against corrosion, dusting and chemicals.



## PRIMER M80

### EPOXY PRIMER FOR METAL

Two component, epoxy based primer with excellent corrosion protection properties for use on metal surfaces. It has high structural strength, abrasion and chemical resistance.

#### FEATURES

Excellent adhesion to metal surfaces. Protect metal from corrosion. Resistant to acids, bases, oils, gasoline, solvents and salt water. Perfect resistance to water, freeze, humidity and harsh weather conditions. Easy application. Can be used indoor and outdoor applications. Long working time and pot life.

#### APPLICATION AREAS

It is designed as an anticorrosive & anti-rusting primer on iron and steel substrates prior to the application of waterproofing membranes and coatings. Application examples include protection of silos, steel bridges, fences, metals roofs, pipes, reinforcement bars etc.



## BINDER PU RB 205

### STANDARD PRESS

One component, polyurethane binder which cures by reaction with atmospheric moisture. It is 100% solids, low viscosity and produces a elastic membrane with excellent adhesion to recycled rubber granules. This is our fast curing speed binder which is primarily used in press system applications.

#### FEATURES

One component. Excellent adhesion on rubber granules. Enhanced UV stability. Flexible. Durable. Solvent free.

#### APPLICATION AREAS

Parks. Children's playgrounds. School playgrounds. Sport facilities. Outdoor recreation areas. Synthetic surfaces. Rubber floor and doormat. Sound vibration required surfaces.



## BINDER PU RB 102

### POUR IN PLACE


One component, UV stability enhanced polyurethane binder which cures by reaction with atmospheric moisture. It is 100% solids, low viscosity and produces a elastic membrane with excellent adhesion to recycled rubber granules. This is our slow curing speed binder which is primarily used in pour in place applications where humidity is in the 50%- 80% and temperatures is in the 20-35 °C.

#### FEATURES

One component. Excellent adhesion on rubber granules. Enhanced UV stability. Flexible. Durable. Moisture cure. Solvent free.

#### APPLICATION AREAS

Parks. Children and school playgrounds. Running tracks and walkways. Sport facilities. Outdoor recreation areas. Synthetic surfaces.

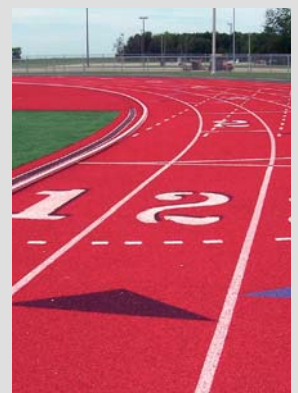

## **BINDER PU RB 103** **ALIPHATIC BINDER**

PU RB 103 is a solventless, moisture cure, one component, transparent, UV stable polyurethane binder. It is designed for track, sport and playground applications. It is based on high quality aliphatic prepolymer for excellent UV and color stability.

### **FEATURES**

Excellent UV and color stability. High elongation. Excellent bonding of rubber granules. Easy application. Environmentally friendly. Water resistant.

### **APPLICATION AREAS**

Parks. Children and school Playgrounds. Running tracks. Sport facilities. Outdoor carpets and tiles. Sport facilities. Outdoor recreation areas. Synthetic surfaces.



## **DF25** **2K POLYURETHANE DILATATION FILLER**

A self-leveling polyurethane sealant ideal for horizontal applications. Its elasticity allows it to absorb continual movements of the structure caused by thermal changes without problems of cracking.

### **FEATURES**

Two component. Easy to mix. Fast cure. Self-leveling consistency, easy to apply in horizontal joints. Possesses permanent elasticity. High adhesion strength. Capable of  $\pm 25\%$  joint movement. Paintable

### **APPLICATION AREAS**

Used for sealing of horizontal joints. Interior and exterior. Expansion joints between many different construction materials. Industrial floors. Driveways/Garages. Sidewalks.



## **SPR 230** **2K SPRAY FOAM**

2K polyurethane foam system which is designed for spray applications. The material must be applied with a high pressure plural component spray polyurethane machine. Mobile application of system has advantages in construction site and high building applications. Because of spray and on-site application, it takes the shape of the surface and because of that property it can be applied any type of area and surface.

### **FEATURES**

Its main application areas are; poultry farms, cold storage tanks, terraces, roofs, basement ground floors, ceilings, external walls insulation, ground insulation.

### **APPLICATION AREAS**

Generally application is done with 25-50 kg/m<sup>3</sup> density polyurethane systems. Since it prevents bacteria growth and it is approved for food contact, specially can be applied for food storage tank insulation and animal shelters. Based on DIN 4102-1 standard can be classified as B1 and B2 fire resistance class.



EN 14315-2



# 06

# AEROSOL

## PRODUCTS



*Creates Permanent Solutions*

## E60 ELECTRICAL CONTACT CLEANER



A product designed to remove flux and other surface contaminants. The product evaporates quickly from the surface without leaving any residue. But protective layer. It is designed for cleaning grease, dirt etc. from electric, electronic equipment.

### FEATURES

Fast cleaning action for removal of flux traces, light oils, finger prints and other contaminants. Periodic planned application prolongs the life expectancy of components. Non-conductive and non-corrosive. Evaporates completely, with a very thin protective layer. Safe for all metal surfaces, most rubbers, plastics and coatings. It is recommended to be tested on sensitive plastics, adhesive-mounted or stressed parts. Convenient to use 360° (upside-down).

### APPLICATION AREAS

Calculators. Computers. Digital Equipment. Electronic Ignitions. Navigation. Equipment. Printed Circuits. Radars. Radios. Switches and Relays. Circuit breakers. Alarm and signal systems. Terminals. Plugs and sockets.



## E70 PENETRATING OIL SPRAY

High performance penetrating oil enriched with MoS<sub>2</sub>.

### FEATURES

Excellent penetrating capability. Penetrates into hard-to-reach areas quickly. Loosen rusted parts and form a protective layer between metal surfaces. Diminish friction. Remove water and protects against moisture. Protects metal parts and surfaces from corrosion. Eases quick disassembly of mechanical components, fittings, assemblies, nuts and bolts and other close tolerance fasteners. Leaves a solid lubricating MoS<sub>2</sub> film. Reduces wear and facilitates future disassembly. MoS<sub>2</sub> reduces friction even elevated temperatures.

### APPLICATION AREAS

Seized and rusted nuts and bolts. Locks and hinges. Screwed parts. Equipment disassembly. Corroded fasteners. Valves. Air tools. Chains and conveyors. Agricultural equipment.



## E80 SILICONE LUBRICANT

Silicone based mould release agent. It shows perfect performance even at very high temperatures.

### FEATURES

Due to its silicone content, provides long working life at high temperatures. Lubricates to reduce friction and eliminate squeaks in all, types of mechanical parts. The product repels water, protects and renews rubber surfaces. Anti-static and anti-corrosive. Does not leave residues. Insoluble in water. Non-toxic.

### APPLICATION AREAS

As a cleaner and mould release agent in textile, plastic and rubber industries. Windshield wiper linkage. Interior hinges, slides or springs. Snow blower chutes.



## E90 ANTI SPATTER SPRAY

Aerosol product that protects materials and surfaces in welding area against particles spattering during welding process. It ensures a perfect welding operation.

### FEATURES

Anti-adhesion product for arc welding. Prevents the adhesion of "projections" on all treated surfaces. Suitable for protecting nozzles, weld units and tools. Non flammable after evaporation of the solvent.

### APPLICATION AREAS

Nozzles and shrouds. Torches. Workpieces and parts. Jigs. Automatic and semi-automatic welding. Welding robots.



## C104 LABEL & STICKER REMOVER

Natural orange oil extract developed for removing labels and stickers nice and easy. It can also be used as the ultimate degreaser because of its superficial solving power.

### FEATURES

Directly penetrates to the surface and quickly dissolves adhesive residue from glass and painted surfaces. An easy solution for removing window stickers, bumper stickers, residue from tape, markers, crayons, lipstick, metal parts, motors, tools, printing presses and concrete and others. Safe to use on all nonporous automotive surfaces, metal, paint, bumpers, plastic, and glass windows. Does not damage automotive paint. Can be used to clean the annoying residue from sticky labels. Aerosol spray can allows quick and easy application. Works on many surfaces and has pleasant citrus scent. It also does not contain any CFC propellants, does not damage paintwork or plastics and can be applied to larger areas in minimal time.

### APPLICATION AREAS

Safe to use on windows, leather, vinyl, fabric, auto bodies, painted surfaces, tools, plastic, metal and wood.



## C108 PAINT REMOVER

An aerosol stripper which removes paint from most types of surfaces. The convenient aerosol can be easily sprayed to hard to-reach areas and does not drip or run.

### FEATURES

Aggressively strips even the toughest paints. Convenient spray is easy to use. Ease of use saves time. No wastage due to accurate spray. Spray gets into hard to reach areas. Clings well to vertical surfaces. Thick formula clings to extend contact time. Easy clean up.

### APPLICATION AREAS

Any metallic surface with mild to heavy paint remains. Removes acrylics, epoxies, lacquers, adhesives and most other automotive finishes. Light industrial environments. Should not be used on fiberglass, plastics, styrene related plastics, vinyl, linoleum.



# Akfix®



# A40 MAGIC

## CORROSION INHIBITOR, LUBRICANT AND MULTI PURPOSE PROTECTOR SPRAY

Corrosion Inhibitor, Lubricant and Multi Purpose Protector aerosol Spray. It's special formula combines many properties such as cleaning, lubricating, loosening rusted part, driving out moisture. It can be used in industrial, home and daily labors.

### FEATURES

Ultimate penetrating ability. Loosens rusted or corroded bolts, nuts, cables and any other fasteners. Greases and loosens door and window hinges, locks, and other fittings. Decreases frictions and stops squeaks of pedals, chairs, windows, faucets and hinges. Does not contain silicone and any dirt trap additives. Drives the moist out of the surface and dries it out thus provides longtime lubricating effect. Protects metal parts against rust. Provides maintenance by penetrating into surface and protects it against dirt. Dissolves tar, gum, adhesive etc. Permeates into grease and dirt and creates a protective film layer on the surface.

### APPLICATION AREAS

In all fittings, door and window mechanisms, locks, handles, hinges. For annulling humidity on metallic surfaces of bikes, motorbikes, small motor vehicles, electronic contacts and other home tools such as drills, jigsaws, etc. For loosening and activating rusted and jammed mechanisms. Can be used as protective on surfaces vulnerable to water and rust. For dissolving adhesive materials like tar, gum, adhesive tapes etc. Can be used for cleaning and maintenance of weapons.



## ULTIMATE PENETRATION

# 07

# AUTOMOTIVE

REPAIR, CARE, PROTECTIVE  
PRODUCTS



*Creates Permanent Solutions*



**SHORE  
A55**

## ALLBOND MS WINDSHIELD ADHESIVE


Isocyanate-free, thixotropic, high modulus, primerless windshield adhesive based on MS Polymer technology. It provides quick drive-away time and easy application without pre-heating for vehicles.

### FEATURES

Flexible, secure sealing of vehicle windshields. Primerless application. Eco-friendly, free from isocyanate, solvent, acids and halogens. Very low VOC content. High and quick initial adhesion. One component, easy to apply, without the need of pre-heating. Fast curing, low odor, high modulus and non-sag properties.

### APPLICATION AREAS

Ideal for glass replacement in automotive repair, such as windshields, rear glass, side glass and other stationary glass. Sealing and bonding of sunroof applications. Suitable for metal, steel, aluminum, glass, copper, zinc and fiberglass.

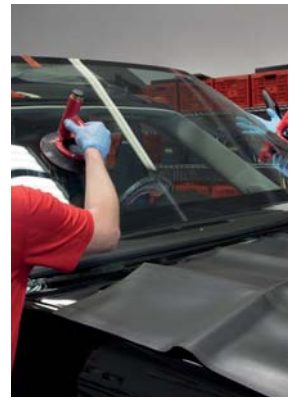

"Conforms to the requirements of VOC content specifications in LEED credit EQc4.1  
"Low-emitting products" of SCAQMD rule 1168."



## PU WINDSHIELD MS WINDSHIELD ADHESIVE

One component, moisture curing polyurethane based adhesive for direct glazing in AUTOMOTIVE GLASS REPLACEMENT.

### FEATURES

One component formulation. Good non-sag properties. Short cut-off string. Cold application. Fast curing – Rapid strength development. High mechanical performance. High Modulus. High initial bond strength. Can be overpainted.

### APPLICATION AREAS

It is especially useful in bonding windshield glass into automotive frames.



**SHORE  
A55**

## WINDSHIELD PRIMER

Black primer specifically designed for the ceramic band on vehicle glass. It ensures the complete protection of the adhesive by creating a barrier against harmful UV rays which can lead to the degradation of the adhesive. It is also an adhesion promoter.

### FEATURES

One component. Fast drying. Protects urethane from harmful ultraviolet rays. Promotes urethane adhesion to automotive glass.

### APPLICATION AREAS

For the treatment of bond faces prior to application of Windshield Adhesive. Can also be used as a general purpose primer which is used to promote adhesion to glass.



## 706 AUTO KIT FAST ADHESIVE



Two part special set consist of a high viscosity cyanoacrylate adhesive and activator set which is used especially on wood, rubber, most plastics, small glass pieces, leather and other common substrates in the automobile.

### FEATURES

Very fast bonding. High adhesive strength. Thanks to its high viscosity formula, it can be used in vertical places without pour and splash. Activator makes it possible and incredibly fast to bond even porous surfaces.

### APPLICATION AREAS

It is suitable for the bonding of a very wide range of materials, including acidic surfaces and some porous ones, where rapid bonding times are required. Repair of the wood, rubber, most plastics, small glass pieces, leather and other common parts in the automobile. Perfect company in daily life for most bonding purposes.



## HT300 GASKET MAKER RTV SILICONE

High-performance silicone sealant developed for sealing, bonding and repairing works where heat resistance is required. It is an ideal sealant for high temperature construction applications. It reacts with atmospheric moisture to produce a tough, elastic silicone.

### FEATURES


Excellent heat resistance after curing up to 250 °C permanently and up to 300 °C temporarily. Acetoxi cure, RTV silicone. 100% silicone. Fast cure, high strength. Resists to mechanical enforcement after curing. Remains flexible at low (-40 °C) and high (+250 °C) temperatures. Will not crack, shrink or become brittle. One component. Conforms to the requirements of VOC content specifications in LEED credit EQc4.1 "Low-emitting products" of SCAQMD rule 1168.

### APPLICATION AREAS

Sealing and bonding applications in automotives. On heating systems and ovens for sealing/tightness. Sealing and bonding in stoves. In heating devices. Gaskets in pumps and motors. In sealing chimneys. Other bonding and sealing applications where parts must perform at high temperatures.



## R110 BRAKE AND CLUTCH CLEANER



Powerful cleaning aerosol is used to remove oil, grease, dirt and dust from brakes and clutches, aiding in the elimination of brake squeal and clutch slip caused by glazing and contamination. Brake cleaner helps brakes last longer and perform better.

### FEATURES

Effectively removes the deposits like leaking brake fluid, grease, oil and hardened contaminations. Eliminates dust from brake and clutch parts. Reduces disc-brake squeal and clutch chatter. Can be applied without disassembly, saving time and reducing maintenance costs. Evaporates quickly. Leaves no residue. Excellent penetration. Stable, non-staining and non-corrosive to metals. Aerosol is equipped with a 360° (upside-down) spray valve and extension tube for added convenience.

### APPLICATION AREAS

Perfect for cleaning and degreasing:

- Brake linings
- Cylinders
- Disc brake pads
- Wedge brakes
- Calipers
- Drums
- Brake shoes
- Discs
- Springs
- Clutch discs





## R60 TYRE REPAIR KIT

Eliminates the need for an immediate tyre change, sealing and inflating your tyre within seconds.

### FEATURES

No need for lifting- jack or any other tools. Finds the hole in the tyre and seals it. Water based. Can be cleaned easily with the water after application. Does not harm the tyre valve. Instantly repairs punctured tyres, without removing the wheel. Inflates the tyre (up to a pressure of 1,2 to 2,5 bar), so the vehicle can be ride after the application at a moderate speed. Harmless to tyres and wheels.

### APPLICATION AREAS

For cars, motorcycles, caravans and trailers. For tubeless tyres or tyres with inner tubes.



## R70 TYRE CLEANER & POLISH FOAM

Specially developed for cleaning, treating and protecting tyres as well as enhancing their appearance in one process. Enhances the appearance of weathered tires by restoring the rubber surface

### FEATURES

Easy to use. Does not contain flammable solvents. Non-acid formula. Self-acting foam removes residues and dirt. Makes tires look like new. Cleans and cares.

### APPLICATION AREAS

Suitable to use on all kind of vehicle tires like bicycles, motorcycles, automobiles, minibuses, buses, trucks, lorries etc.



## R76 ENGINE CLEANER


Excellent product developed against engine oil, grease and stubborn dirt.

### FEATURES

It will not damage any parts in engine. Provides a brilliant view and protection to the engine besides the cleaning. Thanks to its superior content, it offers to penetrate and remove the stubborn dirt, oil and grease on the engine. Contain ozone-friendly propellants that do not harm the environment. Harmless for electronic circuits. It easily reaches, penetrates and cleans the most difficult areas. Does not damage rubber, plastic and painted surfaces. Does not contain silicone. It contains citrus essences.


### APPLICATION AREAS

Car Engines, Motorcycles, Machines, It is suitable for all types of engines, such as lawn mowers.

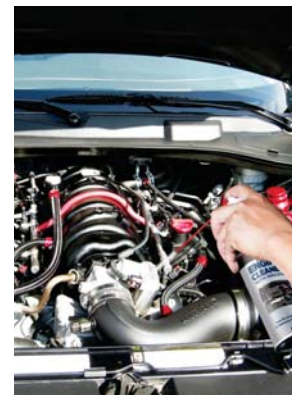



# industrial wipes



Cylinder  
Plastic  
package **75 PCS**

One  
package  
has **20 PCS**  
wipes

Industrial strength hand cleaning wipes that are capable of removing oil, grease, paint, ink and adhesives. The textured side of the wipe will gently but efficiently remove all ingrained contamination. The smooth side of the wipe will effectively retain contamination and will prevent re-soiling of the hands. Hands are clean and dry in one application, all without the use of water.

## FEATURES

Non-hazardous to user or environment. High absorbency - contamination stays on wipe. Textured material assists cleaning power. Optimum dose of cleaner applied to the wipe. Excellent cleaning power - even on tough contaminants. Convenient, simple and safe to use. Contains Aloe Vera for moisturizing your skin for protection. Leaves no residue.

## APPLICATION AREAS

Industrial wipes removes difficult contaminants, such as adhesive, gasket residue, bitumen, silicone, ink, oil, grease, lubricants and paint from surfaces. Usable on hands.

## C12 METAL POLISH

Polishes every kind of gold, silver, copper, chrome, brass, bronze, aluminum, platinum from tarnishing and can make a protective film on the surface.

### FEATURES

Excellent penetrating capability. Diminish friction. Removes water and protects against moisture. Protects metal parts and surfaces from corrosion.

### APPLICATION AREAS

It is well used for cleaning and polishing auto parts, kitchenware, tiles, fiberglass.



# 09

# SPRAY PAINT

## PRODUCTS

*Creates Permanent Solutions*



## ACRYLIC SPRAY PAINT



Designed for numerous application possibilities. Special spray system, which is even used by famous graffiti artists. Available in a broad range of the best-selling colours, mainly matching to RAL.

### FEATURES

High-grade nitro-combi quality. Very good coverage. Excellent adhesion on many surfaces. Good flow, smooth surface. Quick-drying. Suitable for indoor and outdoor applications. The surface is polishable. Weather-resistant, light-proof, UV-resistant. Scratch-, shock- and impact-resistant. Quick-drying (The drying time depends on surrounding temperature, air humidity and thickness of the applied coat).

### APPLICATION AREAS

Suitable for wood, metal, paper, glass or paintable hard plastics as well as for many textiles for any variety of designing applications. Also applicable for the designing of finery, concrete and natural stone.



## METAL MATT EFFECT SPRAY PAINT



Ideal for handicraft works on wood, metal, glass, cardboard and plants. Bronze Spray is particularly suitable for decorative indoor uses and indispensable for stand constructors, decorators, and flower-arrangers. Metal matt spray is also a good choice for handicraft work at home or in courses and seminars.

### FEATURES

High-grade synthetic quality. Long-term high coverage and filling power. Excellent adhesion. Good flow, smooth surface. Quick-drying (The drying time depends on surrounding temperature, air humidity and thickness of the applied coat). Suitable for use on indoor objects. Resistant to water and common household cleansers. Effect of gloss can change by intense rubbing or wiping.

### APPLICATION AREAS

For handicraft works on wood, metal, glass, cardboard and plants. Suitable for decorative indoor uses.



## METAL GLOSSY EFFECT SPRAY PAINT



Gives a long-term look similar to polished chrome and gold to smooth surfaces. Not weather-resistant. Not resistant to abrasion, therefore not suitable to spray on objects for daily use.

### FEATURES

High-grade acrylic quality. Resistant to water and common household cleansers. Effect of gloss can change by intense rubbing or wiping. Colour of contents similar to cap. Very good coverage. Very high gloss. Excellent adhesion. Good flow, smooth surface. Quick-drying (The drying time depends on surrounding temperature, air humidity and thickness of the applied coat).

### APPLICATION AREAS

Suitable for all smooth surfaces like metal, wood, glass and many coatable plastics. Indispensable for constructors of fair booths, decorators, florists etc., but also for handicrafts at home, in courses and seminars.





## BUMPER SPRAY PAINT

Scratched and weathered bumpers are a thing of the past. It is used to repair and improve plastic bumpers while still maintaining the original structure. The spray can be directly applied to plastic surfaces without the need to primer and gives synthetic surfaces a silky shine.

### FEATURES

Long-lasting shine and colour. Keeps the bumper's original structure. Scratch and shockproof. Easy to use. Fast drying time (The drying time depends on surrounding temperature, air humidity and thickness of the applied coat. Excellent coverage. Excellent adhesion. Suitable for many other synthetic materials.

### APPLICATION AREAS

It can be used to repair and improve plastic bumpers while still maintaining the original structure. Suitable for decorative indoor uses. Gives synthetic surfaces a silky shine.



## INOX SPRAY PAINT

Designed for all lacquer finishes and repairs in the colour of stainless steel, for colour adaptations in the surrounding field of stainless steel surfaces (test the color!).

### FEATURES

High-grade nitro-combi quality. Very good coverage. Excellent adhesion on many surfaces. Good flow, smooth surface. Suitable for indoors and outdoors applications. Weather-resistant, light-proof, UV-resistant. Scratch-, shock- and impact-resistant. Resistant to engine oils, diluted cleansers etc. Quick-drying (The drying time depends on surrounding temperature, air humidity and thickness of the applied coat).

### APPLICATION AREAS

For all lacquer finishes and repairs in the colour of stainless steel, for colour adaptations in the surrounding field of stainless steel surfaces (test the color!). Application is possible on the most surfaces e. g. metal, wood, glass, ceramics, paper, stone etc.



## ENAMEL SPRAY PAINT

Designed for quick and easy repair of irritating scratches or similar small damages on white enamel surfaces such as bath-tubs, sinks, toilet bowls, instantaneous water-heaters, and refrigerators.

### FEATURES

High-grade acrylic quality. For white glossy enamel surfaces. Hard, durable surface. Very good coverage. Excellent adhesion. Good flow, smooth surface. Scratch-, shock- and impact-resistant. Quick-drying (The drying time depends on surrounding temperature, air humidity and thickness of the applied coat).

### APPLICATION AREAS

Suitable for quick and easy repair of irritating scratches or similar small damages on white enamel surfaces such as bath-tubs, sinks, toilet bowls, instantaneous water-heaters, and refrigerators. Not suitable for large-area repairs such as wash-bowls, bathtubs.




# ACCESSORIES




XFG04




XFG06

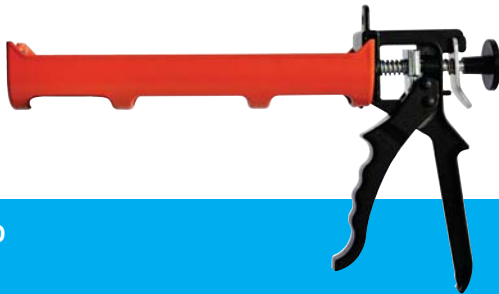

AKT350

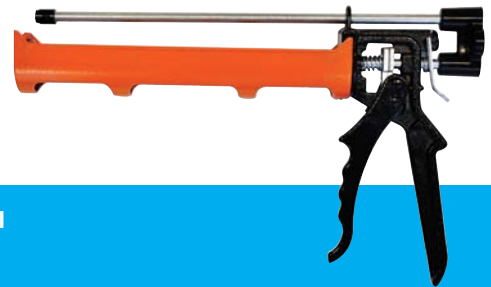

AKT351

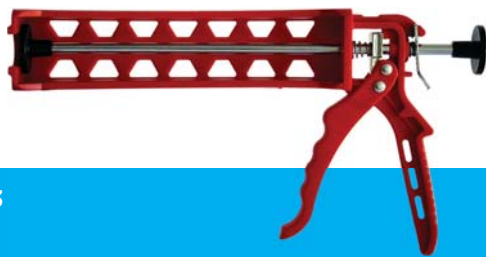

AKT353



AKT121 (400ml)  
AKT122 (600ml)

## MULTI GUN & REUSABLE CARTRIDGE

### Reusable Cartridge Using



### Standart Cartridge Using



# TAPES



PRODUCT NAME	TYPE	BOX / PCS
Anti-Slip Tape	25 mm X 5 m	48
Anti-Slip Tape	50 mm x 15 m	24
Acrylic Double Foam Sided Tape	10 mm x 5 m	100
Acrylic Double Foam Sided Tape	15 mm x 5 m	70
Acrylic Double Foam Sided Tape	20 mm x 5 m	60
Acrylic Double Foam Sided Tape	24 mm x 5 m	44
Acrylic Double Foam Sided Tape	30 mm x 5 m	60
Acrylic Double Foam Sided Tape	40 mm x 5 m	30
Acrylic Double Foam Sided Tape	50 mm x 5 m	30
Masking Tape Hot - Melt Glue 50°	18 mm x 25 m	96
Masking Tape Hot - Melt Glue 50°	24 mm x 25 m	72
Masking Tape Hot - Melt Glue 50°	36 mm x 25 m	48
Masking Tape Hot - Melt Glue 50°	48 mm x 25 m	36
Masking Tape Natural Rubber Glue and Semi - Creep Paper 60°	18 mm x 35 m	96
Masking Tape Natural Rubber Glue and Semi - Creep Paper 60°	24 mm x 35 m	72
Masking Tape Natural Rubber Glue and Semi - Creep Paper 60°	36 mm x 35 m	48
Masking Tape Natural Rubber Glue and Semi - Creep Paper 60°	48 mm x 35 m	36
Masking Tape Natural Rubber Glue and Semi - Creep Paper 80°	18 mm x 35 m	96
Masking Tape Natural Rubber Glue and Semi - Creep Paper 80°	24 mm x 35 m	72
Masking Tape Natural Rubber Glue and Semi - Creep Paper 80°	30 mm x 35 m	48
Masking Tape Natural Rubber Glue and Semi - Creep Paper 80°	48 mm x 35 m	36
Duct Tape Grey	48 mm x 40 m	96/6
Duct Tape Black	49 mm x 40 m	96/6
Duct Tape Red	48 mm x 40 m	96/6
Duct Tape Yellow	48 mm x 10 m	96/6
Duct Tape Green	48 mm x 10 m	96/6
Duct Tape Blue	48 mm x 10 m	96/6
Caution Tape	50 mm x 180 m	72
Caution Tape	50 mm x 360 m	24
Caution Tape	70 mm x 180 m	24
Caution Tape	70 mm x 360 m	12
Floor Marking Tape	50 mm x 25 yds	24